

SAS ODS HTML + PROC Report = Fantastic Output

Girish K. Narayandas, OptumInsight, Eden Prairie, MN

ABSTRACT

ODS (Output Delivery System) is a wonderful feature in SAS to create consistent, presentable reports. Using this feature in combination with the powerful PROC Report can give you a lot of control over the report structure, design and overall appearance. You can set the column width, font style and size, add colors where desired, and include a picture or a logo, just to name a few. This paper contains tips and tricks for producing a presentation-worthy HTML output making use of some of the key features available in ODS HTML, PROC Report and SAS Macros.

INTRODUCTION

Most companies strive to maintain uniformity and a certain level of consistency across the SAS reports they generate in order to align with corporate branding. Things such as the logo, colors, fonts, report structure etc., are some of the key details that define a corporate brand. In the data reporting world, it is common to see multiple developers/programmers creating reports separately. Sometimes these programmers are spread out across the country. In the case of global companies, they might even be located in different nations. The challenge is that management wants to see all of these individually developed reports rolled into one document. A unified document requires manual effort by developers or analysts to compile the individual outputs, and additional time and effort spent making each report look visually consistent with the corporate brand. This paper demonstrates how to automate the process by using pre-existing SAS tools and features. This paper also shows how to add additional functionality to a summary document such as point-and-click access into the granularity of each report, and a button to export data into Excel. Following this methodology, each time a new report is created it will append itself to the summary book and keep the compiled report current and consistent.

ODS HTML + PROC REPORT = FANTASTIC OUTPUT: AN EXAMPLE

Below is a screen shot of a data ETL (extraction transformation and loading process) quality check report. This report contains a content page and individual load quality control (QC) summaries. These summaries are available immediately after each data source loads. Because data comes from different sources at varying times throughout the month, we want to run a quality check each time a new data set is refreshed. Each individual report contains tables for the data source, the load type, whether table validation is required, and what the thresholds are for quality inspection. In this fictional example, a rolling three-month average of the data counts, including thresholds, is used to determine if new data is valid. New data's calculated validity is displayed with a value 'PASS' or 'FAIL' in the final column, QC_Result. For quick and easy readability, 'compute' option in PROC REPORT procedure is utilized, to change the color of the cell to be 'green' for pass and 'red' for the tables that failed QC inspection.

SAS Output - Windows Internet Explorer provided by Microsoft

File Edit View Favorites Tools Help

Favorites UntitledHealth ARO Alg Stat Rpt TWS Login HPSM HPSM- Failed Algs ARO Counts RM Page CE Flow ETL Counts OPS Docs Global Ref List TWS JOBS ARO Env. HP Performance Mgr ITSM-TWS Jobs that Aben... NQ OZ - Optum Zone Report ...

SAS Output

ETL Load QC Summary List - (201409)

- OXFARMINGTON
 - ETL Load QC Summary
 - Table 1
- NORTHSTAR
 - ETL Load QC Summary
 - Table 1
- SAPPHIRE
 - ETL Load QC Summary
 - Table 1



ETL Load QC Report

Data Source: OXFARMINGTON
Run Month: 201409

TABLE_NAME	LOAD_TYPE	BOOK_MONTH	RUN_MONTH	3MON ROLLING AVG	CURR_RECORD_CNT	VALIDATE	TOLERANCE	ABS_PCT_DIFF	QC_RESULT
OXF_ADJUSTMENT_CODE	MONTHLY	AUG14	Sep14	2852	3854	Y	10	0.0701262	PASS
OXF_CLAIM_ADJUSTMENT	MONTHLY	AUG14	Sep14	3653065	3680057	Y	12	0.7308084	PASS
OXF_CLAIM_CONDITION	MONTHLY	AUG14	Sep14	25715	23382	Y	10	9.0725268	PASS
OXF_CLAIM_DETAIL	MONTHLY	AUG14	Sep14	4162179	3953345	Y	15	5.01742	PASS
OXF_CLAIM_DETAIL_LINE_CONTROL	MONTHLY	AUG14	Sep14	4468812	4231738	Y	15	5.6497919	PASS
OXF_CLAIM_HEADER	MONTHLY	AUG14	Sep14	1497618	1390618	Y	15	7.1446791	PASS
OXF_CLAIM_INTAKE	MONTHLY	AUG14	Sep14	4461437	4223655	Y	15	5.3297178	PASS
OXF_CLAIM_INTAKE_LINE_CONTROL	MONTHLY	AUG14	Sep14	129608	110998	N	0	14.358882	PASS
OXF_CLAIM_OCCURRENCE	MONTHLY	AUG14	Sep14	100610	91359	Y	12	9.194911	PASS
OXF_CLAIM_VALUE	MONTHLY	AUG14	Sep14	55489	51022	Y	12	8.0502442	PASS
OXF_GROUP	MONTHLY	AUG14	Sep14	395423	396882	Y	10	0.3183932	PASS
OXF_LOB	MONTHLY	AUG14	Sep14	2575	2613	Y	10	1.4757282	PASS
OXF_MODIFIER	MONTHLY	AUG14	Sep14	547	547	Y	10	0	PASS
OXF_NETWORK	MONTHLY	AUG14	Sep14	839	848	Y	10	1.0727056	PASS
OXF_POS	MONTHLY	AUG14	Sep14	65	65	Y	10	0	PASS
OXF_PROCEDURE_CODE	MONTHLY	AUG14	Sep14	23625	23627	Y	10	0.0086982	PASS
OXF_PRODUCT	MONTHLY	AUG14	Sep14	1853	1894	Y	10	2.2126282	PASS
OXF_PROVIDER	MONTHLY	AUG14	Sep14	593968	594396	Y	10	0.2239204	PASS
OXF_PROVIDER_AGREEMENT	MONTHLY	AUG14	Sep14	4453527	4451400	Y	10	0.0477599	PASS
OXF_PROVIDER_NETWORK	MONTHLY	AUG14	Sep14	366020	363049	Y	10	0.7602146	PASS
OXF_PROVIDER_NPI	MONTHLY	AUG14	Sep14	408238	413379	Y	10	1.0118806	PASS
OXF_SPECIALTY_CODE	MONTHLY	AUG14	Sep14	312	312	Y	10	0	PASS

STEPS INVOLVED

Here are the nine steps I used to create the report illustrated above. Each step is explained in greater detail in the subsequent sections.

```

/*-----
STEP-1: Create Summary Macro
-----*/
%macro generate_summary ;

/*-----
STEP-2: Check for necessary directories, If they don't exist,
Create required directories, assign Library names etc.
-----*/
%if %sysfunc (fileexist(load_qc_&run_month.)) ^= 1 %then...

/*-----
STEP-3: USE PROC TEMPLATE to Customize Content Title
-----*/
Proc template;
...

/*-----
STEP-4: Initiate the HTML Report
-----*/
ODS HTML ...;

/*-----
STEP-5: DRIVE macro to list all the Final Datasets

```

```

ready for reporting
-----*/
%MACRO DRIVE(dir);
    ...
/*-----
STEP-6: Create any additional report components that are
       needed, store them into Macro Variables
-----*/
PROC SQL noprint; select distinct INTO: ...

/*-----
STEP-7: Output HTML File for each dataset in the output dir
-----*/
ODS HTML FILE =...

/*-----
STEP-8: PROC Report to stylize the output report
-----*/
PROC REPORT DATA =...

/*-----
STEP-9: E-Mail Component
-----*/
DATA _NULL_;
    FILE mymail; ...

```

1. CREATE A SUMMARY REPORT MACRO

The generate_summary macro is central to the automation process. It consists of using PROC TEMPLATE step, PROC REPORT step, ODS Statements, creating and executing other macros, email components etc. Depending on the situation, the macro can be utilized to meet the reporting needs of a single team with multiple users, or could be enhanced further to handle reports generated by multiple teams across a division or multiple projects in a company.

```

/*-----
STEP-1: Create Summary Macro
-----*/
%MACRO generate_summary ;
    ...
%MEND generate_summary ;

```

2. CREATE NECESSARY DIRECTORIES AND LIBRARY NAMES

The purpose of this step is to organize the directories by each run month. We use the sysfunc(fileexist) function to determine if the necessary project directory structure is

already set up or if it needs to be created. Because multiple members across a team can execute the summary macro, and each teammate uses this macro in a new run month (say, 201410), all the required directories wouldn't be in place. So, we create the needed folders and assign library names as shown. This step is an optional step, customized for the multiple person scenario.

```
/*-----  
STEP-2: Check for necessary directories, If they don't exist,  
Create required directories, assign Library names etc.  
-----*/  
%if %sysfunc (fileexist(load_qc_&run_month.)) ^= 1 %then %do  
  systask command "mkdir -p &loc./&run_month./qc_hub" wait;  
  systask command "mkdir -p &loc./&run_month./qc_hub/data" wait;  
  systask command "mkdir -p &loc./&run_month./qc_hub/out" wait;  
%end;  
  
libname in_data "&loc./&run_month./load_qc_hub/data";  
libname output "&loc./&run_month./load_qc_hub/out";
```



3. PROC TEMPLATE PROCEDURE

I used the PROC TEMPLATE procedure to customize the default "Table of Contents" text that is the default. There are several ready-made styles to choose from. I changed the default style to 'seaside' to suit my needs. However, a deeper dive into PROC TEMPLATE procedure can provide you with an even greater level of control over the general style, font, text, border and table attributes. For more information on editing styles please refer to 'SAS 9.2 Output Delivery System User's Guide, SAS Documentation' available at <http://support.sas.com/documentation/cdl/en/odsug/61723/PDF/default/odsug.pdf>.

```
/*-----  
STEP-3: USE PROC TEMPLATE to Customize Content Title  
-----*/  
PROC TEMPLATE;  
  define style styles.test;  
    parent=styles.seaside;  
    style contenttitle from contenttitle /  
    pretext = "ETL Load QC Summary List - (&run_month.)";  
  end;  
run;
```

Table of Contents

1. The Print Procedure
Data Set SASHELP.CLASS

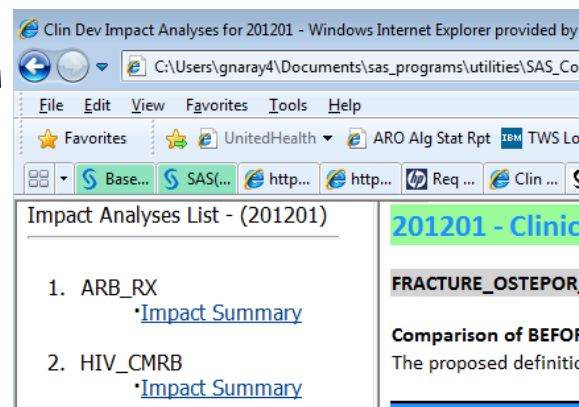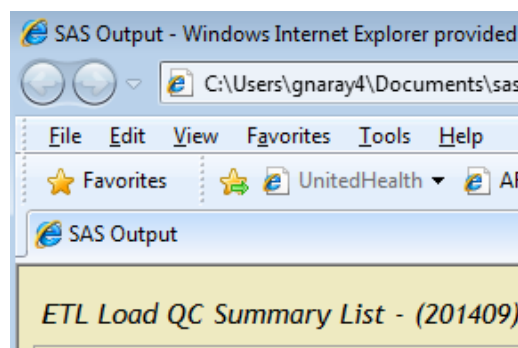

4. INITIATE ODS HTML

The **ODS HTML** statement opens or closes the HTML destination. The **PATH=** option specifies the location of the HTML files. **FRAME** identifies the file that integrates the table of contents, the page contents, and the body file. **CONTENTS** opens the HTML destination and creates the file that contains a table of contents for the output. ODS HTML automatically creates an **ANCHOR** for every piece of output generated by the SAS procedures. An anchor specifies a particular location within an HTML file. In order for the links from the contents, page, or frame file to work, each piece of output in the body files must have a unique anchor to link to. For **STYLE**, we are choosing modified seaside style names as 'test' created in the PROC TEMPLATE step described above. ODS HTML syntax has been improving in recent years and there are other ways discussed in greater detail by Eric Gebhart in his paper by 'ODS HTML Evolution: HTML that Scrolls, Panels, Floats, Reads, and Integrates'

```
/*-----
STEP-4: Initiate the HTML Report
-----*/
ODS HTML frame = "Frame_ETL_Load_QC.html"
              (title="ETL Load QC Summary Report for &run_month.")
              contents = "Contents.html"
              anchor = "data_source"
              path = "&loc./&run_month./summary_rpt/" (url=none)
              style = test;
```

5. MACRO TO PRINT ALL DATASETS OF A DIRECTORY

This macro is a ready-to-use portable macro available on the SAS support website, <http://support.sas.com/kb/25/074.html>. It enables you to print all files in a folder with a specified extension. This macro takes 2 parameters. The first parameter is the directory that contains the files. The second parameter is the file extension of the files you are looking for. I made a few modifications to this macro, included in steps 6, 7 and 8 described below to meet my report needs.

```
/*-----  
STEP-5: DRIVE macro to list all the Final Datasets  
ready for reporting  
-----*/  
%MACRO drive(dir,ext);  
  %let filrf=mydir;  
  
  /* Assigns the fileref of mydir to the directory and opens the  
  directory */  
  %let rc=%sysfunc(filename(filrf,&dir));  
  %let did=%sysfunc(dopen(&filrf));  
  
  /* Returns the number of members in the directory */  
  %let memcnt=%sysfunc(dnum(&did));  
  
  /* Loops through entire directory */  
  %do i = 1 %to &memcnt;  
  
    /* Returns the extension from each file */  
    %let name=%qscan(%qsysfunc(dread(&did,&i)),-1,.);  
  
    /* Checks to see if file contains an extension */  
    %if %qupcase(%qsysfunc(dread(&did,&i))) ne %qupcase(&name)  
%then %do;  
  
    /* Checks to see if the extension matches the parameter value */  
    /* If condition is true prints the full name to the log */  
    %if (%superq(ext) ne and %qupcase(&name) = %qupcase(&ext))  
or  
      (%superq(ext) = and %superq(name) ne) %then %do;  
      %put %qsysfunc(dread(&did,&i));  
    %end;  
  %end;  
  %end;  
  
  /* Closes the directory */  
  %let rc=%sysfunc(dclose(&did));  
  
%MEND drive;  
  
/* First parm is the dir of where your files are stored. */
```

```

/* Second parm is the extension you are looking for.          */
/* Leave 2nd parm blank if you want a list of all the files. */

%drive(c:\,sas)

```

6. BUILD ADDITIONAL REPORT COMPONENTS AS NEEDED

While the summary report is great, sometimes it is useful to have access to other details. For example you can look up who ran the report, or open the work request pertaining to the report. We can include such details by creating macro parameters when the jobs are executed and use them in the report as clickable buttons, shown in the illustration below.

```

/*-----
STEP-6: Create any additional report components that are
needed, store them into Macro Variables
-----*/
proc sql noprint;
    select distinct compress(fact, " ") into: factname
    from &librf..&fname. ;
    select distinct impact_definition into: impact_def
    from &librf..&fname. ;
    select distinct (developer) into: developer
    from &librf..&fname. ;
    select distinct (rundate) into: rundate
    from &librf..&fname. ;
    select distinct (fact_request) into: fact_request
    from &librf..&fname. ;

quit;

footnote4 J=1 "<div align=""left""><input type=""button""
value=""Open Request""
onclick=javascript:window.open('&fact_request')></div>";
footnote5 j=1 '<input
onclick=document.execCommand('SAVEAS',true,
'c:\\temp\\test.xls')" value= "Download To Excel"
type="button">';

```

The screenshot shows a web browser window titled "Clin Dev Impact Analyses for 201201 - Windows Internet Explorer provided by Microsoft". The address bar shows the path "C:\Users\gnaray4\Documents\sas_programs\utilities\SAS_Code_Library\clinde". The browser has several tabs open, including "Base SAS: ODS and Col...", "SAS/GRAPH(R) 9.3: Refe...", "http://support.sas.com...", "Clin Dev Impact Ana...", and "http://support.sas.com...".

The main content area displays the "201201 - Clinical Development Fact Impact Analysis Report". On the left, there is a sidebar titled "Impact Analyses List - (201201)" with three items: "1. ARB_RX", "2. HIV_CMRB", and "3. FRACTURE_OSTEP". Each item has a link to its "Impact Summary".

The main report area for "ARB_RX" shows a "Comparison of BEFORE and AFTER Populations" with the text "The proposed definition reflects - Adding TWO GPIs (369945 369965)". Below this is a table with the following data:

CLIENT	TOTAL BEFORE CHANGE	DROPPED	ADDED	NET FACT	NET CHANGE	NO FACT	TOTAL POPULATION
AGI	430	.	.	430	0.00%	12,638	13,068
FLR	1,483	18	13	1,478	(0.34%)	23,449	24,927
HKG	5,687	.	.	5,687	0.00%	223,397	229,084
KIC	282	.	.	282	0.00%	6,440	6,722
NRE	4,951	76	40	4,915	(0.73%)	98,023	102,938

Below the table, the report lists "Developer : GNARAYANDAS" and "Date : 23FEB11". At the bottom, there are two buttons: "Open Request" and "Download To Excel".

7. WRITE HTML OUTPUT FILE FOR EACH DATASET OR PROCEDURE

The **FILE=** option identifies the file containing the HTML version of the procedure output. To have customized labels in the table of contents, use the ODS PROCLABEL statement. Since **PROCLABEL** affects only the SAS procedure immediately following it, it works great in this situation, since we need different labels to represent different data sources each time PROC REPORT iterates.

```
/*-----
STEP-7: Output HTML File for each dataset in the output dir
-----*/
ods html file =
"&loc./&run_month./summary_rpt/ETL_Load_QC_&data_source..html"
anchor = "data_source" ;
ods proclabel "&data_source.";
```

8. PROC REPORT TO STYLIZE THE OUTPUT

There is a quite bit of material already available on PROC REPORT procedure if you want

to understand all the intricate details, features and choices it has to offer. The intention of this paper is to illustrate just a few of these options, combined with ODS HTML and SAS utilities to develop a refined report.

```

/*-----
STEP-8: PROC Report to stylize the output report
-----*/
proc report data = &librf.&fname.
    split='*'
    contents = "ETL Load QC Summary"
    style(header) =
        [just = left
        font_face = calibri
        font_size = 3
        foreground = white
        background = orange
        protectspecialchars=off] ;

    column Table_name Load_Type Book_Month Run_Month
           AVG_Count_3MON CURR_Record_CNT VALIDATE TOLERANCE
           ABS_PCT_DIFF QC_RESULT ;

    define Table_name/display 'TABLE_NAME' style={just=l vjust =b };
    define Load_Type / display 'LOAD_TYPE' style={just=c vjust =b };
    define Book_Month/ display 'BOOK_MONTH' style={just=c vjust =b };
    define Run_Month/ display 'RUN_MONTH' style={just=c vjust =b };
    define AVG_Count_3MON / display '3MON ROLLING AVG' style={just=c
vjust =b };
    define CURR_Record_CNT/ display 'CURR_RECORD_CNT' style={just=c
vjust =b };
    define VALIDATE/ display 'VALIDATE' style={just=c vjust =b };
    define TOLERANCE / display 'TOLERANCE' style={just=c vjust =b };
    define ABS_PCT_DIFF / display 'ABS_PCT_DIFF' style = {just=c
vjust =b };
    define QC_RESULT / display 'QC_RESULT' style={just=c vjust =b };

    compute qc_result;
        if qc_result = 'PASS' then
            call define(_col_, "style", "style={background=limegreen}");
        else if qc_result = 'FAIL' then
            call define(_col_, "style", "style={background=crimson}");
        else call define(_col_, "style", "style={background=crimson}");
    endcomp;

    TITLE1 j=1 '<IMG SRC="/location/OPTUM.gif" HEIGHT=80 >';

    TITLE3 j=1 c=white bcolor = orange font=calibri h=6 bold "ETL Load
QC Report";

    TITLE5 j=1 c=White bcolor = grey font=calibri h=4 bold "Data

```

A

B

C

D

E

F

```

Source: &Data_source";

TITLE6 j=1 c=White bcolor = grey font=calibri h=4 bold "Run Month:
&run_month";

footnote J=1 "<div align=""left""><input type=""button""
value=""Open Request""

QUIT;

```

- A. PROC REPORT has regular DATA statement. SPLIT breaks a column heading when it reaches that character and continues the heading on the next line. The split character (*) itself is not part of the column heading although each occurrence of the split character counts toward the 256-character maximum for a label. CONTENTS specifies text for the HTML or PDF table of contents entry for the output.
- B. STYLE: option or rather options, in the PROC REPORT statement can add great amount of detail to the report. For example, we have listed six options in that statement. We are stating that the header be LEFT JUSTIFIED, font style = Calibri, font size =3, controlling background and foreground colors. When sending output to the HTML destination using PROC REPORT a number of the usual attributes are not available. The issue arises when you type something like '<MCA />' into your data then SAS will protect those characters and output will actually be converted into character entities that doesn't make sense. A simple fix for such situations is to turn off protectspecialchars attribute within style definitions, so SAS ignores special characters and output exactly as entered.
- C. COLUMN: The primary function of the COLUMN statement is to provide a list of variables for REPORT to print in the order from left to right that they are to appear on the report. Even though it is not used here, you can do a number of things on the COLUMN statement, for example, you can use a comma to attach a statistic to a variable. It can also add headers and to group variables.
- D. DEFINE: While COLUMN statement is used to declare the variables of interest, DEFINE statements provide the details of how to use those variables. Specifies how to use a report item. In this particular report, we are using it for DISPLAY of the variable name. Additionally, other STYLE attributes could be chosen.
- E. COMPUTE: A compute block can be associated with a report item or with a location (at the top/bottom of a report/page. You create a compute block with the COMPUTE window or with the COMPUTE statement. There is enormous flexibility with COMPUTE statement. In our example, we are simply using compute statement to change colors of the cell based on the QC_RESULT value of a data source table.
- F. TITLE and FOOTNOTES: statements can be defined anywhere in the SAS program

9. EMAIL COMPONENT:

This is a straight forward SAS utility that most of the SAS users are already aware of. If a different email composition needs to be sent to different team members based on quality check result, several email compositions could be written and used with appropriate conditional logic.

```
/*-----  
STEP-9: E-Mail Component  
-----*/  
filename mymail email to="userid@optum.com"  
          subject="ETL Load QC Summary Report - &run_month." ;  
  
data _null_;  
  file mymail;  
  put "Hi %upcase(&&sysuserid)," /;  
  put "The ETL Load QC Summary Report for the month of  
&run_month. Completed processing." /;  
  put "Please review the Load QC Summary Results at the link  
below" /;  
  put "File://X:&run_month./output/Frame_ETL_QC_Summary.htm" /;  
  put "Thank you!" /;  
  put " " ;  
run;
```

CONCLUSION

PROC REPORT is a very powerful report generating tool that is fairly easy to use once you get familiar with it. Initially the key words and different syntax style may seem complex, but it becomes more manageable and even enjoyable as you become familiar with the flexibility and choices available to spruce up your reports. Combining PROC REPORT with ODS HTML, SAS MACROS and other SAS utilities, you can create impressive and versatile reports for your company.

REFERENCES

1. Carpenter, Art (2012). Carpenter's Guide to Innovative SAS Techniques textbook (Chapter 8.4, Using PROC REPORT to Better Advantage, pages 280 -290)
2. Carpenter, Arther, L. (2012). PROC REPORT Basics: Getting Started with the Primary Statements
3. Gebhart, Eric (2010), SAS Institute Inc., Cary, NC; ODS HTML Evolution: HTML that Scrolls,
4. Gebhart, Eric. (2009). SAS Institute Inc., Cary, NC; Inline Formatting with ODS Markup". Proceedings of the SAS Global Forum 2009 Conference.
support.sas.com/resources/papers/proceedings09/222-2009.pdf.
5. Olinger, Chris (2000) ODS For Dummies, Proceedings of SUGI 25 (April 9-12, 2000)

6. SAS Notes and Concepts for ODS - Colors Concepts
http://support.sas.com/rnd/base/ods/templateFAQ/Template_colors.html
7. SAS 9.2 Output Delivery System User's Guide, SAS Documentation' available at
<http://support.sas.com/documentation/cdl/en/odsug/61723/PDF/default/odsug.pdf>.
8. SAS Support, Sample 25074: Listing all files that are located in a specific directory,
<http://support.sas.com/kb/25/074.html>
9. PROC REPORT Statement – SAS Documentation,
<http://support.sas.com/documentation/cdl/en/proc/61895/HTML/default/viewer.htm#a002473620.htm>
10. Wendi L. Wright (200), ODS Step by Step, Educational Testing Service, Princeton, NJ, proceedings of NorthEast SAS Users Group (NESUG)

TRADEMARK CITATIONS

SAS and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration. Other brand and product names are trademarks of their respective companies.

CONTACT INFORMATION

Your comments and questions are valued and encouraged.

Contact the author at:

Girish Narayandas

Optum

13625 Technology Drive

Eden Prairie, MN 55344

Email: girish.narayandas@optum.com

www.optum.com