

USING PROC EXPAND WITH TIME SERIES DATA

ANDREW H. KARP

SIERRA INFORMATION SERVICES, INC.

INTRODUCTION

PROC EXPAND performs important operations on time series contained in SAS® System data sets. Among the key functionalities of this procedure, found in the Econometrics and Time Series (ETS) module of the SAS System for Information Delivery, are:

- conversion of observations from one sampling frequency to another
- interpolation of missing values in a time series
- changing the attributes of a time series observation

PROC EXPAND creates an output SAS data set. It does not create printed output.

KEY TERMS AND CONCEPTS

Familiarity with key concepts underlying how the SAS System processes date, time and datetime variables is central to effective use of this procedure. These concepts are discussed in detail in Chapter 21 of the *SAS/ETS® Users Guide, Version 6, Second Edition* ("Date Intervals, Formats and Functions") and this author's paper *Working With SAS® Date and Time Functions* elsewhere in these Proceedings. Among the key concepts underlying use of PROC EXPAND are:

- **Time Series:** a series (i.e., a vector) of data collected at equally spaced points in time
- **Period/Frequency:** the point in time (or period) at which the observations were collected (e.g., hourly, daily). In some instances the term *sampling frequency*, is used, and is defined as the frequency with samples from some processes were taken.
- **Attribute:** the point in the *period* where the observation was made (e.g., beginning, middle, end, total).

- **Interpolation:** changing from a lower frequency series to a higher frequency series.
- **Aggregation:** changing from a higher frequency series to a lower frequency series.

Figure One demonstrates the concepts of interpolation and aggregation. If an analyst wants to convert daily observations in to monthly observations, she would *aggregate* the data. In this instance the **sampling frequency** with which the observations were taken is 'daily.' Conversely, if she had a series of quarterly values from which monthly values were to be estimated, she would *interpolate* values with a monthly sampling frequency from the quarterly series.

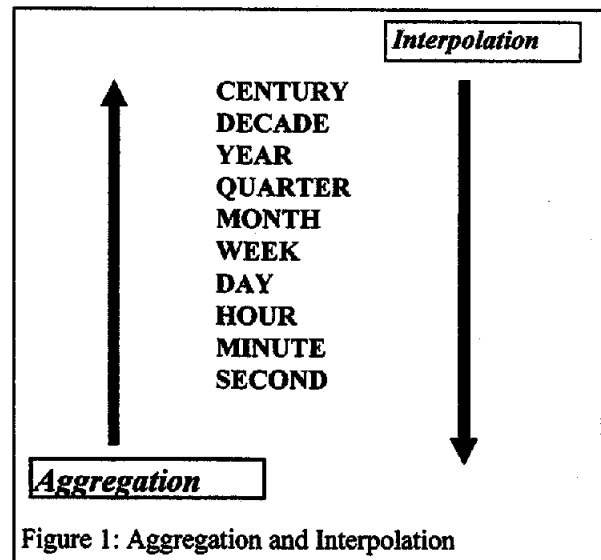


Figure 1: Aggregation and Interpolation

Input Data Set

Two important conventions need to be observed in the SAS data set upon which PROC EXPAND will operate. As described below, at least one variable in the input data set must be a SAS date, time or datetime variable. The name of this variable is usually placed in the ID statement. Unexpected results (explained below) will result if this convention is not observed.

Analysis and Modeling

Second, the 'analysis variable(s)' (that is, the variable(s) to be placed in the CONVERT statement must 'form time series,' which means their values are sorted in ascending order (from lowest to highest value) of the date, time or date time variable which will be used in the ID statement. A value of the date time or datetime variable **must** be present for each interval in the series. For example, if the variables to be analyzed represent 24 months of observations, then the series must contain a SAS date value for each of the 24 months, even if one or more observations for the analysis variable(s) are missing. As will be discussed below, PROC EXPAND can be used to estimate values of missing data in the analysis variables.

General Form of PROC EXPAND

The general form of PROC EXPAND is:

```
PROC EXPAND DATA=dsn OUT=newdsn
    FROM= timeint TO = timeint ;
ID datevar;
CONVERT varname = newvar/
    OBSERVED = (inattrib, outattrib);
METHOD = method;
```

FROM and TO statements

These statements identify the sampling frequency with which the data were obtained (FROM) and the sampling frequency to which they are to be converted (TO).

ID Statement

The ID statement, while not strictly required, identifies a SAS date, time or date time variable which serves as the reference for the variables upon which PROC EXPAND is to operate.

The observations in your data set **must be sorted by** the values of the variable in the ID statement or PROC EXPAND will not execute. Values of the variables placed in the ID statement are used by the SAS system to:

- identify observations in the output data set created by PROC EXPAND
- determine the time span between observations, as well as detect if gaps, caused by omitted observations, exist in the input data set
- account for 'calendar effects,' such as the number of days in a month and leap years, when performing the desired aggregations and/or interpolations.

If an ID statement is not used the SAS System will assume that the input series starts with the SAS date (or datetime, depending on the sampling frequency placed in the FROM statement) value of 0 (zero), or January 1, 1960. This can lead to undesirable results and use of the ID statement is, therefore, strongly recommended.

Interpolation of Missing Values

Series W10 (Quarterly U.S. Beer Production from the First Quarter of 1975 to the Fourth Quarter of 1982) in Wei's *Time Series Analysis: Univariate and Multivariate Methods* was converted from raw data to a SAS data set, WORK.BEER. Each observation gives the quarterly total number of barrels of beer produced in the United States. The analysis variable is therefore PROD and the date time variable is QTR.

Suppose the input data set in this example, WORK.BEER, contained one or missing values for beer production, and all the analyst wanted to do was estimate values for the missing data. The following code fragment above will result in PROC EXPAND creating a data set with interpolated values for the missing data.

```
PROC EXPAND DATA = WORK.BEER OUT =
    NEWBEER FROM =QTR;
CONVERT PROD/OBSERVED=TOTAL;
ID QTR;
RUN;
```

Users should note that the spline functions used by PROC EXPAND when estimated values of the missing data do not work on missing values at either the beginning or end of the series. The INTERPOLATE option, which is documented in the SAS/ETS manual, should be used in these situations.

Aggregation of Observations from a Higher to a Lower Sampling Frequency

PROC EXPAND can be used to quickly aggregate these quarterly observations to yearly observations:

```
PROC EXPAND DATA=WORK.BEER
    FROM = QTR TO=YEAR
    OUT=YEARLY;
ID QTR;
```

```

CONVERT PROD=YEARPROD / OBSERVED
      = TOTAL;
RUN;

```

The result is a temporary SAS data set, **YEARLY**, containing the aggregated quarterly observations of beer production. The new data set contains two variables, **YEAR** and **YEARPROD**, representing the SAS date variable corresponding to the aggregated observations and the total yearly production, respectively.

Combining Interpolation and Aggregation

The examples presented thus far in the paper show separate invocations of PROC EXPAND for aggregation of data from quarterly to yearly observations and to estimate values of missing data in the time series.

In actual practice, only one invocation of the procedure would be required to accomplish both tasks, as PROC EXPAND would first estimate the values of missing data and then perform the aggregation of interest.

Interpolation of Observations from a Lower to a Higher Sampling Frequency

Using the quarterly beer production data set again, assume that another (not shown here) data set is available with *monthly* values of beer production starting in January 1983. An analyst wants to take the quarterly data in the WORK.BEER data set, estimate monthly values from the quarterly data, and then append the estimated monthly data to the more recent monthly series before preparing a forecast.

The process by which the quarterly observations will be used to estimate monthly values is called *interpolation*, and is carried out by PROC EXPAND in much the same way as is aggregation of observations from a higher to a lower sampling frequency, which as discussed in the previous section.

The following code fragment shows how PROC EXPAND is used to carry out this function:

```

PROC EXPAND DATA = WORK.BEER
      FROM = QTR TO = MONTH
      OUT = BYMONTH;
ID QTR;

```

```

CONVERT PROD = MTHPROD / OBSERVED
      = TOTAL;
RUN;

```

Transformation of Variables by PROC EXPAND

The **TRANSFORMIN** and **TRANSFORMOUT** options in PROC EXPAND, first implemented in Release 6.08, provide a powerful array of tools which operate on the values of variables placed in the **CONVERT** statement. In many situations an analyst may find use of these optional statements a superior alternative to performing variable transformations in the data step.

The data set "Case 9: Air-carrier freight" in Pankratz' *Forecasting with Univariate Box-Jenkins Models* was read in to a SAS data set (WORK.AIRCARGO) and will be used to demonstrate both the **TRANSFORMIN** and **TRANSFORMOUT** options.

TRANSFORMIN Option

This optional statement performs transformations on input values *before* any aggregation or interpolation occurs. Using the WORK.AIRCARGO data set, which gives the number of tons of air cargo flown in the United States by month, the **TRANSFORMIN** option will rapidly convert the original values (tons) into pounds by use of the following code fragment:

```

PROC EXPAND DATA = WORK.AIRCARGO
      OUT = NEWCARGO FROM=MONTH;
ID DATE;
CONVERT TONS = POUNDS / OBSERVED =
TOTAL TRANSFORMIN=(* 2000);
RUN;

```

In this example, the values of the variable **TONS** will be multiplied by 2000 and output to a new data set, **NEWCARGO**. The variable **POUNDS** in data set **NEWCARGO** is the result of applying the operations specified in the **TRANSFORMIN** statement. Since no other operations (e.g., interpolation or aggregation) are specified, the sole effect of this code fragment would be to transform from tons to pounds the monthly amount of air cargo flown in the United States.

TRANSFORMOUT Option

This optional statement transforms data on values *after* PROC EXPAND performs aggregation, interpolation, estimation of values of missing data on the values of variables placed in the **CONVERT**

Analysis and Modeling

statement but *before* they are output to a SAS data set. The TRANSFORMIN and TRANSFORMOUT options can be used in a single invocation of PROC EXPAND, as demonstrated by the following code fragment:

```
PROC EXPAND DATA = AIRCARGO OUT =  
    NEW FROM = MONTH TO = QTR;  
ID DATE;  
CONVERT TONS=LOGPOUNDS/OBSERVED  
    = TOTAL TRANSFORMIN=(*2000)  
    TRANSFORMOUT = (LOG);
```

In this example, tons are converted to pounds before the time series is aggregated from month to quarter. The natural logarithm is then taken on the output values before they are placed in the SAS data set NEW.

A complete list of operations which can be performed in the TRANSFORMIN and TRANSFORMOUT options is given the PROC EXPAND documentation.

Note

SAS and SAS/ETS are trademarks of SAS Institute, Inc.

References:

Pankratz, Alan, *Forecasting with Univariate Box-Jenkins Models*, (Wiley: 1983)

SAS Institute, Inc., SAS/ETS ® User's Guide, Version 6, Second Edition (SAS Institute, Inc : 1993)

Wei, William W.S., *Time Series Analysis: Univariate and Multivariate Methods* (Addison-Wesley : 1990)

The author can be contacted at:

Sierra Information Services
1489 Webster Street
Suite 1308
San Francisco, CA 94115

415/441-0702
SFBAY0001 @ AOL.COM