

SAS/GRAPH® and GfK Maps: a Subject Matter Expert Winning Combination

Louise S. Hadden, Abt Associates Inc., Cambridge, MA

ABSTRACT

SAS® has an amazing arsenal of tools to use and display geographic information that is relatively unknown and underutilized. High quality GfK Geocoding maps have been provided by SAS since SAS 9.3 M2, as sources for inexpensive map data dried up. SAS has been including both GfK and "traditional" SAS map data sets with licenses for SAS/GRAPH for some time, recognizing there will need to be an extended transitional period. However, for those of us who have been putting off converting our SAS/GRAPH mapping programs to use the new GfK maps, the time has come, as the "traditional" SAS map data sets are no longer being updated. If you visit SAS MapsOnline, you will find only GfK maps in current maps. The GfK maps are updated once a year. This presentation will walk through the conversion of a long-standing SAS program to produce multiple US maps for a data compendium to take advantage of GfK maps, as well as several other examples. Products used are Base SAS® and SAS/GRAPH®. SAS programmers of any skill level will benefit from this presentation.

INTRODUCTION

GfK maps were new as of SAS 9.3 M2. Sources for inexpensive map data have become rare, leading SAS to enter into a partnership with a 3rd party source, GfK GeoMarketing, which specializes in map data. The vendor will update the map data sets on a yearly basis. The GfK maps require a lot of changes, but also have their benefits (not the least of which is greater accuracy!) For now, SAS releases are shipping with both the new GfK maps and the traditional map data sets, recognizing that there will need to be an extended transition period. Changes and usage tips are briefly discussed below (more detailed information can be found in the excellent papers GfKMaps2013 by Liz Simon and Darrell Massengill (<http://support.sas.com/rnd/papers/sasgf13/GfKMaps2013.pdf>) and

LIBNAME CHANGES

The traditional SAS maps are currently the default maps. You can point to either map library if desired using the following code:

```
LIBNAME MAPS (MAPSSAS) ;  
LIBNAME MAPS (MAPSGFK) ;
```

Or, you can simply refer to the MAPS or MAPSGFK library when using maps in your program.

FILE AND FILENAME CHANGES

- Added longer, more informative and consistent names (i.e. AFGHANISTAN vs AFGHANIS)
- Added NUTS level files for Europe
- Added _ATTR suffix for attribute files (ARGENTINA_ATTR vs ARGENT12)
- Added PROJPARM (GPROJECT information for all projected maps)
- Eliminated some data sets (such as COUNTY and US2)
- Some maps will be at a different levels of political data (for example COUNTY instead of STATE)

VARIABLE CHANGES

- Many changes to variable names
- Added RESOLUTION variable
- ID variables are now character and unique world wide
- X and Y are ALWAYS projected
- Lat and Long are ALWAYS unprojected, based on the eastern Hemisphere and in degrees (PROC GPROJECT will require the DEGREES and EASTLONG options)

SAS MAPS ONLINE

SAS MAPS ONLINE is truly a buried treasure. It is a SAS-provided web page with a number of useful tools regarding mapping, including both traditional and the GfK map data sets and updates, related data sets (such as SASHELP.ZIPCODE, SASHELP.MAPFMTS, the new GfK WORLD_CITIES_ALL, and WORLDCTS), and sample programs. SAS MAPS ONLINE archives older map data sets and versions of SASHELP.ZIPCODE so that users can match their response data and/or software version appropriately. The zip code files and some other files do change over time so it is important to visit SAS MAPS ONLINE on a regular basis to download newer versions of files, or, you may wish to download an older file which matches the timing of your response data or software. Or maybe you'd just like to see the cool new samples that are available. You can subscribe to an RSS feed so that you will be notified of updates on the page. This is essential as files are refreshed periodically (the zip code files are refreshed every quarter, for example.) **SAS MAPS ONLINE files available on your SAS installation are NOT automatically updated – you (or your system admin) must perform updates manually.** Screenshots of the major web pages related to GfK maps under SAS MAPS ONLINE that may help with navigating the site are presented below. Note that in the current maps page only GfK maps from SAS 9.3M2 (2012) are presented – in order to obtain older versions (non-GfK) maps you must download files from the archive pages. Current GfK maps are provided updated with new installations/versions of SAS (GfK maps are not always updated for maintenance releases.) The next planned GfK update is scheduled for the SAS 9.4M5 release. **Older (non-GfK) maps are NOT being updated, and eventually will be phased out. Unlike the older map data sets, you must have a current license for a SAS product that includes SAS/GRAPH in order to download any GfK maps.**

SAS Maps Online Welcome

SAS Maps Online Home

GfK World Maps under Current Maps

Country Name	ISO Number	Country Code	GfK Version
AFRICA	AFRICA	AFRICA_ATT	94
AFRICA2	AFRICA2	AFRICA2_ATT	94
ASIA	ASIA	ASIA_ATT	95
ASIA2	ASIA2	ASIA2_ATT	95
ASIA3	ASIA3	ASIA3_ATT	95
CARIBBEAN	CARIBBEAN	CARIBBEAN_ATT	95
EUROPE	EUROPE	EUROPE_ATT	93
EUROPE2	EUROPE2	EUROPE2_ATT	93
EUROPE3	EUROPE3	EUROPE3_ATT	93
EUROPE4	EUROPE4	EUROPE4_ATT	93
EUROPE5	EUROPE5	EUROPE5_ATT	93
EUROPE6	EUROPE6	EUROPE6_ATT	93
EUROPE7	EUROPE7	EUROPE7_ATT	93
EUROPE8	EUROPE8	EUROPE8_ATT	93
EUROPE9	EUROPE9	EUROPE9_ATT	93
EUROPE10	EUROPE10	EUROPE10_ATT	93
EUROPE11	EUROPE11	EUROPE11_ATT	93
EUROPE12	EUROPE12	EUROPE12_ATT	93
EUROPE13	EUROPE13	EUROPE13_ATT	93
EUROPE14	EUROPE14	EUROPE14_ATT	93
EUROPE15	EUROPE15	EUROPE15_ATT	93
EUROPE16	EUROPE16	EUROPE16_ATT	93
EUROPE17	EUROPE17	EUROPE17_ATT	93
EUROPE18	EUROPE18	EUROPE18_ATT	93
EUROPE19	EUROPE19	EUROPE19_ATT	93
EUROPE20	EUROPE20	EUROPE20_ATT	93
EUROPE21	EUROPE21	EUROPE21_ATT	93
EUROPE22	EUROPE22	EUROPE22_ATT	93
EUROPE23	EUROPE23	EUROPE23_ATT	93
EUROPE24	EUROPE24	EUROPE24_ATT	93
EUROPE25	EUROPE25	EUROPE25_ATT	93
EUROPE26	EUROPE26	EUROPE26_ATT	93
EUROPE27	EUROPE27	EUROPE27_ATT	93
EUROPE28	EUROPE28	EUROPE28_ATT	93
EUROPE29	EUROPE29	EUROPE29_ATT	93
EUROPE30	EUROPE30	EUROPE30_ATT	93
EUROPE31	EUROPE31	EUROPE31_ATT	93
EUROPE32	EUROPE32	EUROPE32_ATT	93
EUROPE33	EUROPE33	EUROPE33_ATT	93
EUROPE34	EUROPE34	EUROPE34_ATT	93
EUROPE35	EUROPE35	EUROPE35_ATT	93
EUROPE36	EUROPE36	EUROPE36_ATT	93
EUROPE37	EUROPE37	EUROPE37_ATT	93
EUROPE38	EUROPE38	EUROPE38_ATT	93
EUROPE39	EUROPE39	EUROPE39_ATT	93
EUROPE40	EUROPE40	EUROPE40_ATT	93
EUROPE41	EUROPE41	EUROPE41_ATT	93
EUROPE42	EUROPE42	EUROPE42_ATT	93
EUROPE43	EUROPE43	EUROPE43_ATT	93
EUROPE44	EUROPE44	EUROPE44_ATT	93
EUROPE45	EUROPE45	EUROPE45_ATT	93
EUROPE46	EUROPE46	EUROPE46_ATT	93
EUROPE47	EUROPE47	EUROPE47_ATT	93
EUROPE48	EUROPE48	EUROPE48_ATT	93
EUROPE49	EUROPE49	EUROPE49_ATT	93
EUROPE50	EUROPE50	EUROPE50_ATT	93
EUROPE51	EUROPE51	EUROPE51_ATT	93
EUROPE52	EUROPE52	EUROPE52_ATT	93
EUROPE53	EUROPE53	EUROPE53_ATT	93
EUROPE54	EUROPE54	EUROPE54_ATT	93
EUROPE55	EUROPE55	EUROPE55_ATT	93
EUROPE56	EUROPE56	EUROPE56_ATT	93
EUROPE57	EUROPE57	EUROPE57_ATT	93
EUROPE58	EUROPE58	EUROPE58_ATT	93
EUROPE59	EUROPE59	EUROPE59_ATT	93
EUROPE60	EUROPE60	EUROPE60_ATT	93
EUROPE61	EUROPE61	EUROPE61_ATT	93
EUROPE62	EUROPE62	EUROPE62_ATT	93
EUROPE63	EUROPE63	EUROPE63_ATT	93
EUROPE64	EUROPE64	EUROPE64_ATT	93
EUROPE65	EUROPE65	EUROPE65_ATT	93
EUROPE66	EUROPE66	EUROPE66_ATT	93
EUROPE67	EUROPE67	EUROPE67_ATT	93
EUROPE68	EUROPE68	EUROPE68_ATT	93
EUROPE69	EUROPE69	EUROPE69_ATT	93
EUROPE70	EUROPE70	EUROPE70_ATT	93
EUROPE71	EUROPE71	EUROPE71_ATT	93
EUROPE72	EUROPE72	EUROPE72_ATT	93
EUROPE73	EUROPE73	EUROPE73_ATT	93
EUROPE74	EUROPE74	EUROPE74_ATT	93
EUROPE75	EUROPE75	EUROPE75_ATT	93
EUROPE76	EUROPE76	EUROPE76_ATT	93
EUROPE77	EUROPE77	EUROPE77_ATT	93
EUROPE78	EUROPE78	EUROPE78_ATT	93
EUROPE79	EUROPE79	EUROPE79_ATT	93
EUROPE80	EUROPE80	EUROPE80_ATT	93
EUROPE81	EUROPE81	EUROPE81_ATT	93
EUROPE82	EUROPE82	EUROPE82_ATT	93
EUROPE83	EUROPE83	EUROPE83_ATT	93
EUROPE84	EUROPE84	EUROPE84_ATT	93
EUROPE85	EUROPE85	EUROPE85_ATT	93
EUROPE86	EUROPE86	EUROPE86_ATT	93
EUROPE87	EUROPE87	EUROPE87_ATT	93
EUROPE88	EUROPE88	EUROPE88_ATT	93
EUROPE89	EUROPE89	EUROPE89_ATT	93
EUROPE90	EUROPE90	EUROPE90_ATT	93
EUROPE91	EUROPE91	EUROPE91_ATT	93
EUROPE92	EUROPE92	EUROPE92_ATT	93
EUROPE93	EUROPE93	EUROPE93_ATT	93
EUROPE94	EUROPE94	EUROPE94_ATT	93
EUROPE95	EUROPE95	EUROPE95_ATT	93
EUROPE96	EUROPE96	EUROPE96_ATT	93
EUROPE97	EUROPE97	EUROPE97_ATT	93
EUROPE98	EUROPE98	EUROPE98_ATT	93
EUROPE99	EUROPE99	EUROPE99_ATT	93
EUROPE100	EUROPE100	EUROPE100_ATT	93
EUROPE101	EUROPE101	EUROPE101_ATT	93
EUROPE102	EUROPE102	EUROPE102_ATT	93
EUROPE103	EUROPE103	EUROPE103_ATT	93
EUROPE104	EUROPE104	EUROPE104_ATT	93
EUROPE105	EUROPE105	EUROPE105_ATT	93
EUROPE106	EUROPE106	EUROPE106_ATT	93
EUROPE107	EUROPE107	EUROPE107_ATT	93
EUROPE108	EUROPE108	EUROPE108_ATT	93
EUROPE109	EUROPE109	EUROPE109_ATT	93
EUROPE110	EUROPE110	EUROPE110_ATT	93
EUROPE111	EUROPE111	EUROPE111_ATT	93
EUROPE112	EUROPE112	EUROPE112_ATT	93
EUROPE113	EUROPE113	EUROPE113_ATT	93
EUROPE114	EUROPE114	EUROPE114_ATT	93
EUROPE115	EUROPE115	EUROPE115_ATT	93
EUROPE116	EUROPE116	EUROPE116_ATT	93
EUROPE117	EUROPE117	EUROPE117_ATT	93
EUROPE118	EUROPE118	EUROPE118_ATT	93
EUROPE119	EUROPE119	EUROPE119_ATT	93
EUROPE120	EUROPE120	EUROPE120_ATT	93
EUROPE121	EUROPE121	EUROPE121_ATT	93
EUROPE122	EUROPE122	EUROPE122_ATT	93
EUROPE123	EUROPE123	EUROPE123_ATT	93
EUROPE124	EUROPE124	EUROPE124_ATT	93
EUROPE125	EUROPE125	EUROPE125_ATT	93
EUROPE126	EUROPE126	EUROPE126_ATT	93
EUROPE127	EUROPE127	EUROPE127_ATT	93
EUROPE128	EUROPE128	EUROPE128_ATT	93
EUROPE129	EUROPE129	EUROPE129_ATT	93
EUROPE130	EUROPE130	EUROPE130_ATT	93
EUROPE131	EUROPE131	EUROPE131_ATT	93
EUROPE132	EUROPE132	EUROPE132_ATT	93
EUROPE133	EUROPE133	EUROPE133_ATT	93
EUROPE134	EUROPE134	EUROPE134_ATT	93
EUROPE135	EUROPE135	EUROPE135_ATT	93
EUROPE136	EUROPE136	EUROPE136_ATT	93
EUROPE137	EUROPE137	EUROPE137_ATT	93
EUROPE138	EUROPE138	EUROPE138_ATT	93
EUROPE139	EUROPE139	EUROPE139_ATT	93
EUROPE140	EUROPE140	EUROPE140_ATT	93
EUROPE141	EUROPE141	EUROPE141_ATT	93
EUROPE142	EUROPE142	EUROPE142_ATT	93
EUROPE143	EUROPE143	EUROPE143_ATT	93
EUROPE144	EUROPE144	EUROPE144_ATT	93
EUROPE145	EUROPE145	EUROPE145_ATT	93
EUROPE146	EUROPE146	EUROPE146_ATT	93
EUROPE147	EUROPE147	EUROPE147_ATT	93
EUROPE148	EUROPE148	EUROPE148_ATT	93
EUROPE149	EUROPE149	EUROPE149_ATT	93
EUROPE150	EUROPE150	EUROPE150_ATT	93
EUROPE151	EUROPE151	EUROPE151_ATT	93
EUROPE152	EUROPE152	EUROPE152_ATT	93
EUROPE153	EUROPE153	EUROPE153_ATT	93
EUROPE154	EUROPE154	EUROPE154_ATT	93
EUROPE155	EUROPE155	EUROPE155_ATT	93
EUROPE156	EUROPE156	EUROPE156_ATT	93
EUROPE157	EUROPE157	EUROPE157_ATT	93
EUROPE158	EUROPE158	EUROPE158_ATT	93
EUROPE159	EUROPE159	EUROPE159_ATT	93
EUROPE160	EUROPE160	EUROPE160_ATT	93
EUROPE161	EUROPE161	EUROPE161_ATT	93
EUROPE162	EUROPE162	EUROPE162_ATT	93
EUROPE163	EUROPE163	EUROPE163_ATT	93
EUROPE164	EUROPE164	EUROPE164_ATT	93
EUROPE165	EUROPE165	EUROPE165_ATT	93
EUROPE166	EUROPE166	EUROPE166_ATT	93
EUROPE167	EUROPE167	EUROPE167_ATT	93
EUROPE168	EUROPE168	EUROPE168_ATT	93
EUROPE169	EUROPE169	EUROPE169_ATT	93
EUROPE170	EUROPE170	EUROPE170_ATT	93
EUROPE171	EUROPE171	EUROPE171_ATT	93
EUROPE172	EUROPE172	EUROPE172_ATT	93
EUROPE173	EUROPE173	EUROPE173_ATT	93
EUROPE174	EUROPE174	EUROPE174_ATT	93
EUROPE175	EUROPE175	EUROPE175_ATT	93
EUROPE176	EUROPE176	EUROPE176_ATT	93
EUROPE177	EUROPE177	EUROPE177_ATT	93
EUROPE178	EUROPE178	EUROPE178_ATT	93
EUROPE179	EUROPE179	EUROPE179_ATT	93
EUROPE180	EUROPE180	EUROPE180_ATT	93
EUROPE181	EUROPE181	EUROPE181_ATT	93
EUROPE182	EUROPE182	EUROPE182_ATT	93
EUROPE183	EUROPE183	EUROPE183_ATT	93
EUROPE184	EUROPE184	EUROPE184_ATT	93
EUROPE185	EUROPE185	EUROPE185_ATT	93
EUROPE186	EUROPE186	EUROPE186_ATT	93
EUROPE187	EUROPE187	EUROPE187_ATT	93
EUROPE188	EUROPE188	EUROPE188_ATT	93
EUROPE189	EUROPE189	EUROPE189_ATT	93
EUROPE190	EUROPE190	EUROPE190_ATT	93
EUROPE191	EUROPE191	EUROPE191_ATT	93
EUROPE192	EUROPE192	EUROPE192_ATT	93
EUROPE193	EUROPE193	EUROPE193_ATT	93
EUROPE194	EUROPE194	EUROPE194_ATT	93
EUROPE195	EUROPE195	EUROPE195_ATT	93
EUROPE196	EUROPE196	EUROPE196_ATT	93
EUROPE197	EUROPE197	EUROPE197_ATT	93
EUROPE198	EUROPE198	EUROPE198_ATT	93
EUROPE199	EUROPE199	EUROPE199_ATT	93
EUROPE200	EUROPE200	EUROPE200_ATT	93
EUROPE201	EUROPE201	EUROPE201_ATT	93
EUROPE202	EUROPE202	EUROPE202_ATT	93
EUROPE203	EUROPE203	EUROPE203_ATT	93
EUROPE204	EUROPE204	EUROPE204_ATT	93
EUROPE205	EUROPE205	EUROPE205_ATT	93
EUROPE206	EUROPE206	EUROPE206_ATT	93
EUROPE207	EUROPE207	EUROPE207_ATT	93
EUROPE208	EUROPE208	EUROPE208_ATT	93
EUROPE209	EUROPE209	EUROPE209_ATT	93
EUROPE210	EUROPE210	EUROPE210_ATT	93
EUROPE211	EUROPE211	EUROPE211_ATT	93
EUROPE212	EUROPE212	EUROPE212_ATT	93
EUROPE213	EUROPE213	EUROPE213_ATT	93
EUROPE214	EUROPE214	EUROPE214_ATT	93
EUROPE215	EUROPE215	EUROPE215_ATT	93
EUROPE216	EUROPE216	EUROPE216_ATT	93
EUROPE217	EUROPE217	EUROPE217_ATT	93
EUROPE218	EUROPE218	EUROPE218_ATT	93
EUROPE219	EUROPE219	EUROPE219_ATT	93
EUROPE220	EUROPE220	EUROPE220_ATT	93
EUROPE221	EUROPE221	EUROPE221_ATT	93
EUROPE222	EUROPE222	EUROPE222_ATT	93
EUROPE223	EUROPE223	EUROPE223_ATT	93
EUROPE224	EUROPE224	EUROPE224_ATT	93
EUROPE225	EUROPE225	EUROPE225_ATT	93
EUROPE226	EUROPE226	EUROPE226_ATT	93
EUROPE227	EUROPE227	EUROPE227_ATT	93
EUROPE228	EUROPE228	EUROPE228_ATT	93
EUROPE229	EUROPE229	EUROPE229_ATT	93
EUROPE230	EUROPE230	EUROPE230_ATT	93
EUROPE231	EUROPE231	EUROPE231_ATT	93
EUROPE232	EUROPE232	EUROPE232_ATT	93
EUROPE233	EUROPE233	EUROPE233_ATT	93
EUROPE234	EUROPE234	EUROPE234_ATT	93
EUROPE235	EUROPE235	EUROPE235_ATT	93
EUROPE236	EUROPE236	EUROPE236_ATT	93
EUROPE237	EUROPE237	EUROPE237_ATT	93
EUROPE238	EUROPE238	EUROPE238_ATT	93
EUROPE239	EUROPE239	EUROPE239_ATT	93
EUROPE240	EUROPE240	EUROPE240_ATT	93
EUROPE241	EUROPE241	EUROPE241_ATT	93
EUROPE242	EUROPE242	EUROPE242_ATT	93
EUROPE243	EUROPE243	EUROPE243_ATT	93
EUROPE244	EUROPE244	EUROPE244_ATT	93
EUROPE245	EUROPE245	EUROPE245_ATT	93
EUROPE246	EUROPE246	EUROPE246_ATT	93
EUROPE247	EUROPE247	EUROPE247_ATT	93
EUROPE248	EUROPE248	EUROPE248_ATT	93
EUROPE249	EUROPE249	EUROPE249_ATT	93
EUROPE250	EUROPE250	EUROPE250_ATT	93
EUROPE251	EUROPE251	EUROPE251_ATT</	

Misc Updates

Misc Updates


Archives
 Current 2012 2011 2010 2009 2008 2007 2006 2005 2002-2004


Note: After downloading and unzipping these tables you must take them out of transport format by running the **CIMPORT** procedure using the **VERSION** indicated or a HIGHER **VERSION** of the SAS System.

Name	Description	Date Added	SAS Version
Zipcode Dataset	New zipcode dataset, for April 2013, contains 41,267 observations and 19 variables. Includes the ZIPML and ZIPMISC datasets. These additional zipcodes may not be included with the SASHELP.ZIPCODE file. Source: zipcodedownload.com April 2013.	• April 2013	V8 & V9
World_cities_all Dataset	- World Cities dataset much larger than the one distributed in the MAPSPKX library with SAS/GRAPH, contains 1,126,447 observations and 22 variables. This map data set is based on the digital maps from CIPR GeoMarketing and is covered by their Copyright. The data sets can only be used with SAS 9.3 and beyond and requires a SAS/GRAPH license. For license information, see CIPR license. For additional and more detailed maps visit: CIPR GeoMarketing.com/CIPR	• Jan 2013	V9 and 2
Zipcode Dataset	New zipcode dataset, for January 2013, contains 41,267 observations and 19 variables. Includes the ZIPML and ZIPMISC datasets. These additional zipcodes may not be included with the SASHELP.ZIPCODE file. Source: zipcodedownload.com January 2013.	• Jan 2013	V8 & V9

[illegible]

<https://support.sas.com/documentation/cdl/en/grmapref/69722/HTML/default/titlepage.htm> (HTML) and <https://support.sas.com/documentation/cdl/en/grmapref/69722/PDF/default/grmapref.pdf> (PDF)



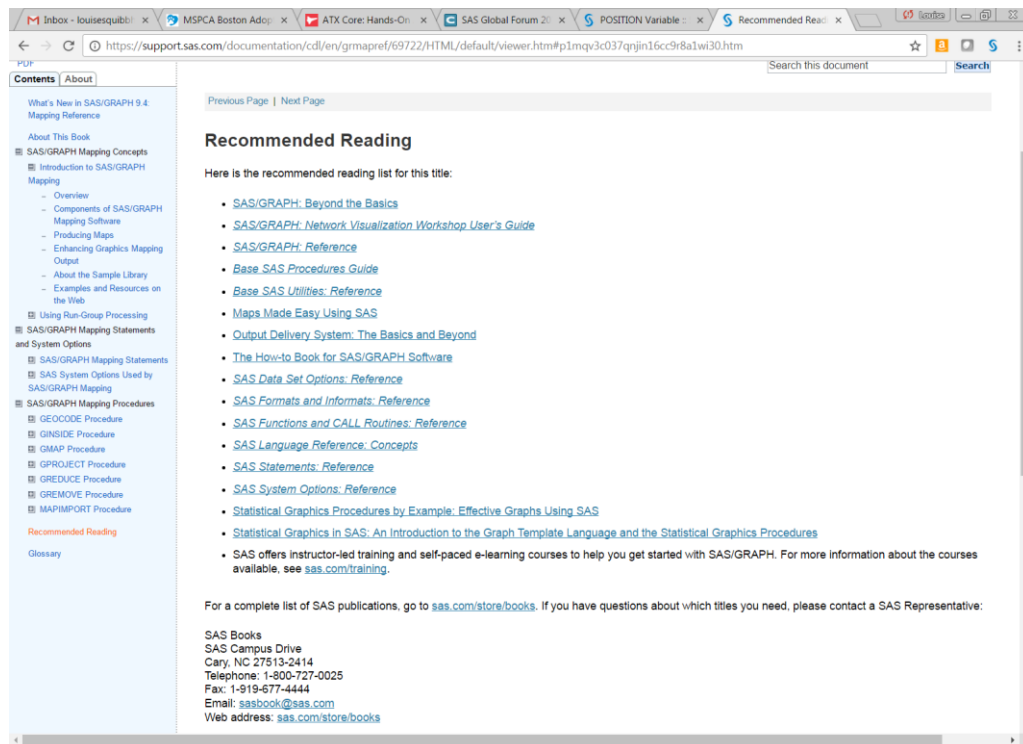

This has been a long time coming and very exciting (I personally have been asking for it for years)! SAS MAPS ONLINE is still your primary resource for updated map data sets and other important information.

EXAMPLE 1: US MAP WITH ANNOTATED BOXES

We need to produce the figures and associated legends for several dozen maps for several dozen different continuous measures and time periods for an annual data compendium ... so, the process is automated. A method was devised using SAS® PROC RANK to generate the quintiles, PROC SQL to get the data value ranges within each quintile, and PROC FORMAT (with the CNTLIN= option) to generate and store the legend labels. The resulting data files and format catalogs are then used to generate both the maps (with legends) and associated "alt text" (for Section 508 compliance). Then, these processes were rolled into a macro to apply the method for the many different maps and their legends.

First, a "base" map data set which includes separate boxes for small states in the Northeast is created. All figures we generate are drawn using this map. The code for this map is loosely based on one of Robert Allison's wonderful examples. Note that the map used is from the SAS MAPS library.

```
DATA mymap;
    SET maps.us (where=(state ne 72));
RUN;
```

```
DATA extra_squares;
    INPUT statecode $ 1-2;
    state=stfips(statecode);
    DATALINES;
NH
VT
MA
RI
CT
NJ
```

```

DE
MD
DC
;
RUN;

DATA extra_squares;
  SET extra_squares;
  RETAIN y;
  segment=999;
  IF _n_=1 THEN y=.15;
  ELSE y=y-.010;
  x=.345; OUTPUT;
  x=x+.040; OUTPUT;
  y=y-.020; OUTPUT;
  x=x-.040; OUTPUT;
RUN;

DATA mymap;
  SET mymap extra_squares;
  state_name=FIPNAME1(state);
RUN;

PROC SQL;
  CREATE table extra_label AS
  SELECT UNIQUE avg(y) AS y, avg(x)+.03 AS x, statecode AS text
  FROM extra_squares
  GROUP BY statecode;
QUIT;
RUN;

DATA extra_label;
  SET extra_label ;
  xsys='2'; ysys='2'; hsys='3'; when='a';
  function='label'; color='gray55'; position='6'; size=2.25;
RUN;

```

The map (with legend) is generated, with a file written to HTML as well as generating a PNG file. OPTIONS are set to output to a landscape page and suppress the printing of the date and page number; GOPTIONSs are set to determine the type of image (PNG), suppress a border around the graphic, determine the units used in measurements of the image, and assign text formatting; ODS listing is closed to suppress “windowing” of the graphic while running in batch, and ODS destination(s) (HTML) are selected. The result is in Figure 1.

```

. . .
goptions device=png noborder;
ODS HTML path=odsout body="&invar._&year..htm" options (pagebreak='no');
ods escapechar='^';
goptions cback=white;
goptions gunit=pct ftitle="albany amt/bold" ftext="albany amt/bold";
goptions htitle=18pt htext=11pt ctitle=black ctext=gray55;

legend1 label=("&leglab." height=8pt position=top justify=center) across=5
  cframe=gold cborder=navy
  position=(bottom center outside) shape=bar(.15in,.15in) mode=reserve
  offset=(0,0)
value=(j=1 "&t1" "&t2" "&t3" "&t4" "&t5");

```

```

pattern1 value=msolid color=white;
pattern2 value=msolid color=lightblue ;
pattern3 value=msolid color=CornflowerBlue ;
pattern4 value=msolid color=blue ;
pattern5 value=msolid color=navy;

title1 a=-90 h=5pct " ";
title2 a=90 h=1pct " ";
title3 h=18pt bold "&year";

proc gmap data=my_data map=mymap all anno=extra_label gout=library.excat;;
id state_name;
choro msr_bin / discrete coutline=gold woutline=1
cdefault=yellow
legend=legend1
html=my_html
des='' name="&y2.";
run;

quit;

```

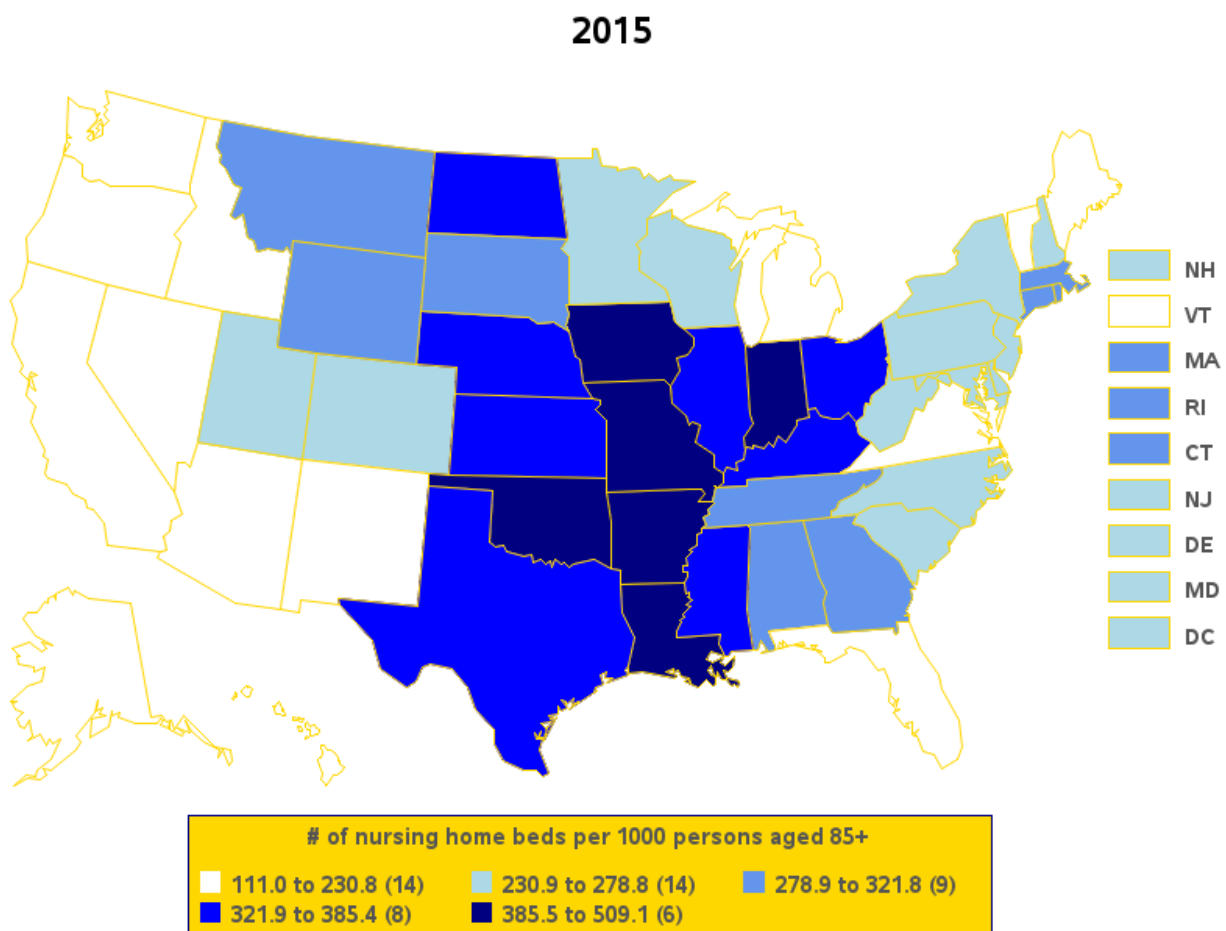


Figure 1: US Map using traditional map data sets

The only change that needs to be made to create this complex set of maps using GfK maps is to change the source library for the US map from MAPS to MAPSGFK.

```
DATA mymap;
  SET mapsgfk.us (where=(state ne 72));
RUN; . . .
```

The result of running the identical code (except for the libname reference) is shown below in Figure 2.

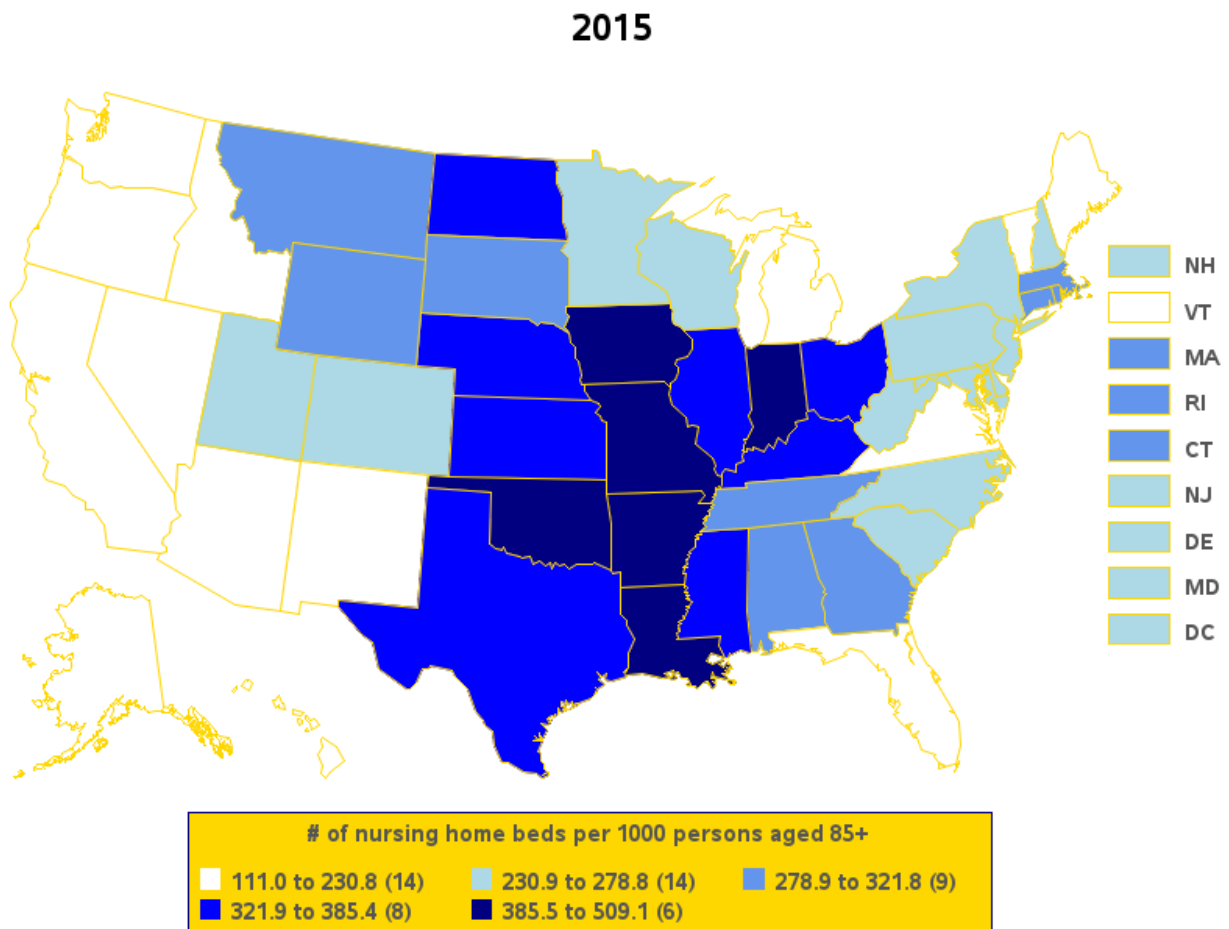


Figure 2: US map using MAPSGFK as map source library

We won't always be that lucky. As noted above, the ID variables for GfK maps are different, AND the traditional map data sets have not been updated for a long time, causing differences in some maps (for example, US county maps). Annotation also becomes an issue, as all GfK maps are projected so you may need to retrieve and reproject the unprojected coordinates.

EXAMPLE 2: OTTER COUNTRY

In this example inspired by Barbara Okerson, we work with a subset of counties in California. We'll reverse directions here and start with the GfK map. It's a relatively simple task with the GfK maps to subset specific counties and annotate city names, etc. in your programs. X and Y are always projected, and LAT and LONG are always unprojected. You have the option of using the more robust ID variable

used in the example below, or the customary ID variables that you used with the traditional map data sets.

First, three contiguous California coastal counties are pulled in from the GfK US_COUNTIES data set. We want to annotate several cities' names onto the output map, so we access the GfK USCITY data file. Because the X, Y variables have already been projected for the entire US in both files, we reset X, Y to LONG, LAT respectively in BOTH files so that they will match.

```
DATA camonterey;
  SET mapsgfk.us_counties (WHERE=(FIPSTATE(state)="CA"
    and county IN(053,081,087)));
  x=long;
  y=lat;
RUN;

DATA anno;
  SET mapsgfk.uscity (WHERE=(statecode="CA"
    and county_name IN("Monterey","San Mateo","Santa Cruz")
    and city IN('Big Sur','Half Moon Bay','Monterey',
      'Castroville')));
  LENGTH function $ 8;
  x=long; y=lat;
  xsys='2'; ysys='2'; hsys='3';
  when='a';
  function='pie';
  style='psolid';
  rotate=360;
  size=1;
  color='navy';
OUTPUT;
  function='label';
  position='C';
  style=' ';
  rotate=.;
  size=2.5;
  color=' ';
  text=catt("    ",city);
OUTPUT;
RUN;
```

As for Figures 1 and 2, a map is generated. OPTIONS are set to output to a landscape page and suppress the printing of the date and page number; GOPTIONS are set to determine the type of image (PNG), insert a background image and format it, determine the units used in measurements of the image, and produce a border; the ODS listing destination is closed to suppress "windowing" of the graphic while running in batch, and ODS destination(s) (HTML) are selected. The result is in Figure 3.

```
/*County Map GMAP code*/

FILENAME odsout '.';
ODS LISTING CLOSE;

GOPTIONS DEVICE=png IBACK='otterbackground.jpg' IMAGESTYLE=fit;
GOPTIONS XPIXELS=900 YPIXELS=900;
GOPTIONS border;

ODS HTML PATH=odsout BODY="gfkmap.htm" STYLE=sasweb;
PATTERN1 V=s C=tan R=3;
```

```

PROC GMAP MAP=Camonterey DATA=Camonterey ANNO=anno;
    ID id;
    CHORO state / DISCRETE NOLEGEND NAME="gfkmap";
RUN;
QUIT;

ODS HTML CLOSE;

ODS LISTING;

```



Figure 3: Map of selected counties using MAPSGFK as map source library

Now, let's see how producing a similar map with traditional SAS maps works. In order to annotate the city names with traditional SAS map files, the x and y variables have to match, and the map and uscity data files must be combined and projected together. You may need to delve into the originating files to find out exactly what x, y, lat and long represent, and if/how any values are projected. Unlike the GfK map data sets which are consistent, there are no guarantees with the traditional map data sets. Once the combined data set is re-projected, the two input data sets are separated again and used as input to a PROC GMAP statement. As you can see, it will take some additional tweaking to get an output map that matches Figure 3. The point here is that unless you are an expert who is familiar with traditional SAS map data sets, it will take you longer to achieve your goals than if you use the more consistent GfK maps.

```
DATA annoc;
  SET maps.uscity (DROP=state WHERE=(statecode="CA" and county
    in(53,81,87) and city in('Big Sur','Half Moon Bay',
      'Monterey','Castroville')));
  LENGTH function $ 8;
  x=long*acos(-1)/180;
  y=lat*acos(-1)/180;
  county=1000;
  xsys='2';
  ysys='2';
  hsys='3';
  when='a';
  function='pie';
  style='psolid';
  rotate=360;
  size=1;
  color='navy';
  OUTPUT;
  county+1;
  function='label';
  position='9';
  style='';
  rotate=.;
  size=2.5;
  color='navy';
  text=catt("    ",city);
  OUTPUT;
RUN;

DATA all;
  SET maps.counties (WHERE=(state=6 and county IN(53,81,87))) annoc;
run;

PROC GPROJECT DATA=all OUT=allp PROJECT=gnomon;
  ID county;
RUN;
QUIT;

DATA citiessp monterey;
  SET allp;
  IF county >999 THEN OUTPUT citiessp;
  ELSE OUTPUT monterey;
RUN;

GOPTIONS DEVICE=png IBACK='otterbackground.jpg' IMAGESTYLE=fit;
GOPTIONS XPIXELS=900 YPIXELS=900;
```

```

GOPTIONS border;

ODS HTML PATH=odsout BODY="mont_std.htm" STYLE=sasweb;
PATTERN v=s c=tan r=3;
PROC GMAP MAP=montereyp DATA=montereyp ANNO=citiesp;
    ID county;
    CHORO county / NOLEGEND NAME="mont_std";
RUN;
QUIT;

ODS HTML CLOSE;

```



Figure 4: Map of selected counties using traditional SAS maps (MAPSSAS) as map source library

EXAMPLE 3: OH, CANADA

In this example we head north to Canada, to map provinces. We begin with a review of the data sets available for Canada in both the MAPSGFK and MAPSSAS directories. We find that the MAPSGFK directory contains CANADA and CANADA_ATTR data sets. The MAPSSAS folder contains a number of data sets related to CANADA, called CANADA, CANADA2, CANADA3, CANADA4, and CANCENS. On the plus side for GfK maps, you only need to investigate one map and attribute data set. On the negative side, the one map that is available is designed to produce a census district level map, not a province level map. On the plus side for traditional map data sets, there's a map (CANADA2) which is designed to produce a province level map. The code to create such a province level map with the traditional map data set CANADA2 is presented below, and the results shown in Figure 6.

```
GOPTIONS DEVICE=png XPIXELS=1200 YPIXELS=900 BORDER;  
  
ODS HTML PATH=odsout BODY="sasprov.htm" STYLE=sasweb;  
PATTERN1 V=s C=vlig R=5000;  
PROC GMAP MAP=mapssas.canada2 DATA=mapssas.canada2;  
    ID province;  
    CHORO province / DISCRETE NOLEGEND NAME="sasprov";  
RUN;  
QUIT;  
ODS HTML CLOSE;
```



Figure 6: Map of Provinces in Canada using traditional SAS map data set CANADA2

The code to create a province level map using GfK map data is slightly more complicated. The GfK CANADA map contains additional ID variables. With some research, we discovered that the ID1 variable

refers to provinces, while the ID variable refers to census districts. In order to produce a map without census district lines, we need to use the GREMOVE procedure, shown below.

```
PROC SORT DATA=mapsgfk.canada OUT=provcanada;  
  BY id1;  
RUN;
```

```
PROC GREMOVE DATA=provcanada OUT=remdiv;  
  BY id1;  
  ID id;  
RUN;
```

Then PROC GMAP code can be run on the new map data set REMDIV, producing the results shown in Figure 7 below.

```
GOPTIONS DEVICE=png XPIXELS=1200 YPIXELS=900 BORDER;  
  
ODS HTML PATH=odsout BODY="gfkprov.htm" STYLE=sasweb;  
PATTERN1 V=s C=vlig R=5000;  
PROC GMAP MAP=remdiv DATA=remdiv ;  
  ID id1;  
  CHORO id1 / DISCRETE NOLEGEND NAME="gfkprovd";  
RUN;  
QUIT;  
ODS HTML CLOSE;
```



Figure 7: Map of Provinces in Canada using PROC GREMOVE and GfK CANADA map data set

Annotating province names in both the GfK and traditional SAS map data sets is a further step, most easily accomplished by using the SAS supplied %CENTROID macro (obtained by running %ANNOMAC in your SAS session), then building an annotate data set to use while mapping.

EXAMPLE 4: THE WORLD AT NIGHT

In this example (also based on an example from Robert Allison), we create an annotate data base with light dots representing world cities sized according to population overlaid on a world map (excluding Antarctica.) In the original code run in 2009, the world map is created from the traditional SAS-supplied world map data set WORLD, while the latitude, longitude, and population of world cities comes from the traditional SAS-supplied WORLDCTS (world cities) data set. The code is presented below and the results shown in Figure 8.

. . .

```
PROC SQL;
CREATE TABLE mymap AS
SELECT long AS x, lat AS y, cont, id, segment
FROM maps.world
WHERE (density<=2) and (id ^= 143) and (id ^=405);
CREATE TABLE worldcts AS
SELECT *, (atan(1)/45 * -1*long) as x, (atan(1)/45 * lat) as y
FROM maps.worldcts;
QUIT;
RUN;

DATA dot_anno;
  LENGTH function style color $ 8 position $ 1;
  RETAIN xsys ysys '2' hsys '3' when 'a';
  SET worldcts;
  anno_flag=1;
  function='pie';
  rotate=360;
  style='psolid';
  color='cornsilk';
  position='5';
  IF (pop > 1000) THEN size=.05;
  ELSE IF (pop > 500) THEN size=.01;
  ELSE size=.0001;
  OUTPUT;
RUN;

DATA combined;
  SET mymap dot_anno;
RUN;

PROC GPROJECT DATA=combined OUT=combined DUPOK PROJECT=robinson;
  ID id;
RUN;

DATA mymap dot_anno;
  SET combined;
  IF anno_flag=1 THEN OUTPUT dot_anno;
  ELSE OUTPUT mymap;
RUN;
```

```

GOPTIONS XPIXELS=800 YPIXELS=600;
GOPTIONS GBACK=black;
GOPTIONS DEVICE=jpeg;
ODS LISTING CLOSE;
ODS HTML PATH=odsout BODY="&name..htm" (TITLE="SAS/Graph worldcts (world
cities) locations") NOGTITLE STYLE=minimal;

TITLE1 F="arial/bo" H=2 "Simulation of Earth's Lights at Night";
TITLE2 F="arial" H=2 "Using SAS-Provided World Cities data";

PATTERN1 v=msolid c=darkblue;

PROC GMAP MAP=mymap DATA=mymap ANNO=dot_anno;
  ID id;
  CHORO id / LEVELS=1 COUTLINE=gray33 NOLEGEND DES="" NAME="&name";
RUN;

```

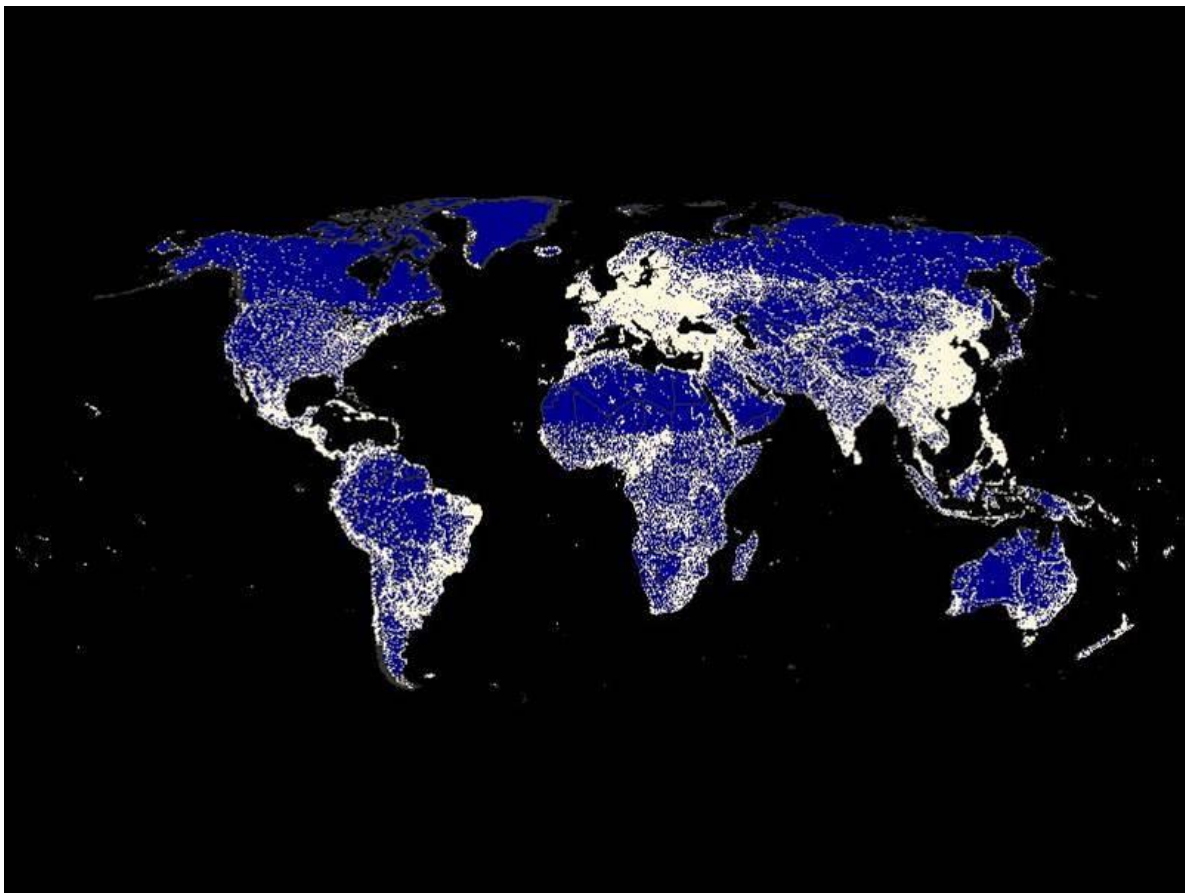


Figure 8: World at night using MAPS.WORLD and MAPS.WORLDC

We attempted to update this map using MAPSGFK.WORLD and MAPSGFK.WORLD_CITIES. WORLDSCT is no longer available from SAS – it was extremely out of date and incomplete. WORLD_CITIES, which shipped / ships with versions of SAS beyond 9.3 M2, is ALSO not complete – you should download WORLD_CITIES_ALL, which is updated annually, from SAS MAPSONLINE (requires a SAS/GRAPH license.) For the purpose of this demonstration, we'll use WORLD_CITIES. WORLD_CITIES has data on around 200,000 cities worldwide – WORLD_CITIES_ALL has data on over 1,000,000 cities. Both MAPSGFK.WORLD and MAPSGFK.WORLD_CITIES have a different ID variable

than MAPS.WORLD and MAPS.WORLDCT. Below follows the image created by the revised code (just replacing the library names) in Figure 9.

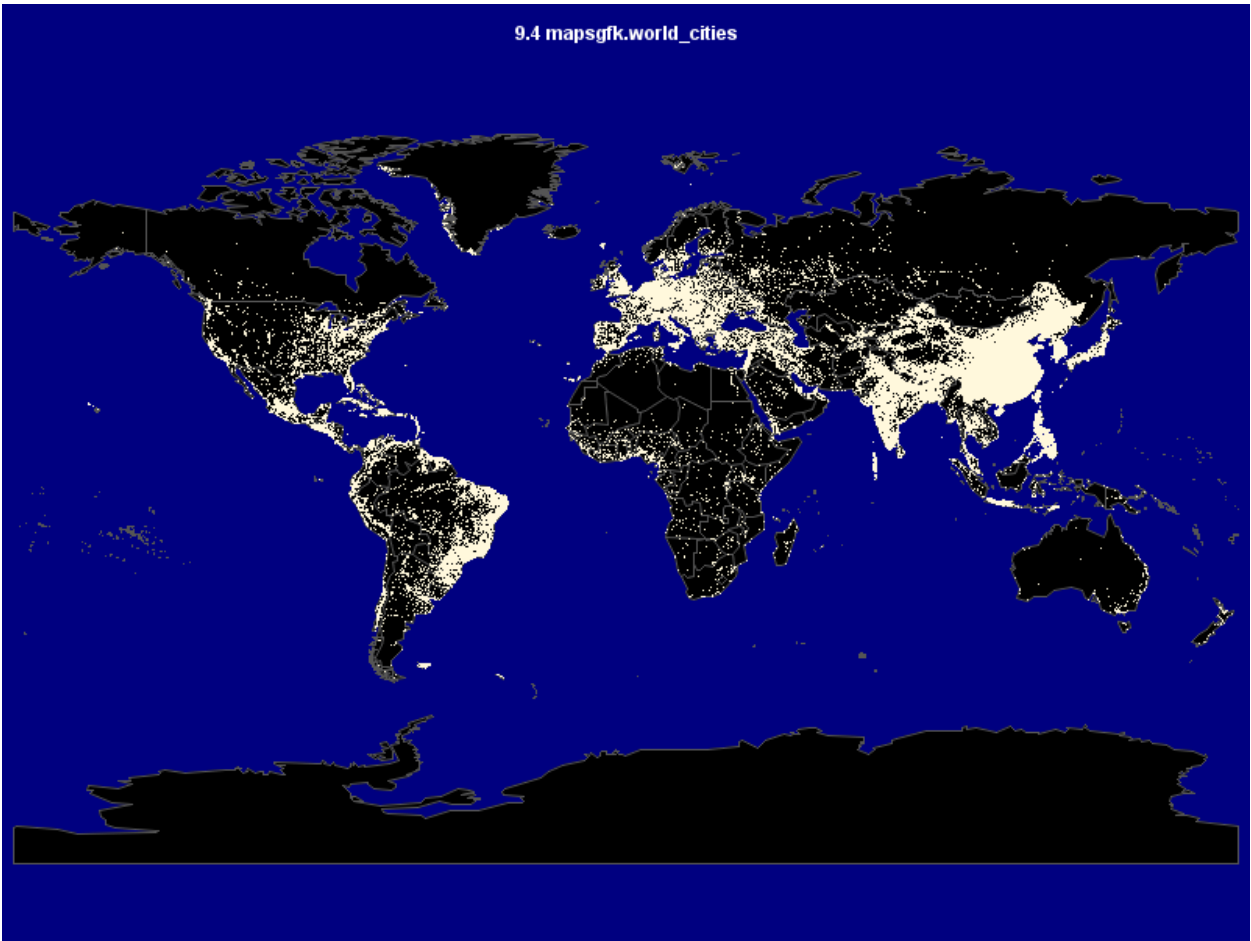


Figure 9: World at night using MAPSGFK.WORLD and MAPSGFK.WORLD_CITIES

What happened here? First of all, Antarctica and Greenland not excluded using the ID variable as a screen.. In 2009, in MAPS.WORLDCT the ID variable was numeric so our where clause did not work. Secondly, MAPS.WORLDCT contained actual population numbers while MAPSGFK.WORLD_CITIES contains a variable with conflicting population levels. In general there is not the curved look evident in the first map. How do we fix this map (and in doing so, give ourselves a blueprint for retrofitting our PROC GMAP code)?

First, check your old and new data sets with PROC CONTENTS and a PROC PRINT test, following up with a PROC FREQ cross-tabulation with relevant variables using the LIST MISSING OPTION. In this case, it was not possible to check the old WORLDCT data set because it is no longer provided, but we have the code we used in the past to provide clues. Below follow snippets of the tests in the SAS list.

Contents listing of MAPSGFK.WORLD

Alphabetic List of Variables and Attributes						
#	Variable	Type	Len	Format	Informat	Label
12	CONT	Num	5			Numeric number for continent
9	DENSITY	Num	5			Greduce density values
1	ID	Char	15			Alpha2 Country code
3	IDNAME	Char	55			Country name
8	ISO	Char	3	\$3.	\$3.	ISO Country code
13	ISOALPHA2	Char	2	\$2.	\$2.	ISO Alpha2-code for country
11	LAKE	Num	5			Lake Flag:1-water:2-citytype

5	LAT	Num	8	Unprojected degrees latitude
4	LONG	Num	8	Unprojected degrees longitude (East)
10	RESOLUTION	Num	5	Map detail level based on . . .
2	SEGMENT	Num	5	ID segment number
6	X	Num	8	Projected Longitude: Cylindrical
7	Y	Num	8	Projected Latitude: Cylindrical

Sort Information
Sortedby ID

Contents listing of MAPSGFK.WORLD_CITIES

Alphabetic List of Variables and Attributes

#	Variable	Type	Len	Label
8	CITY	Char	55	World Cities
5	CITY2	Char	55	Clean CITY name for geocoding
6	CONT	Num	6	Numeric number for continent
9	CtType	Char	25	POP categories for cities where appl.
3	ID	Char	2	Country Alpha code
20	IDNAME	Char	65	Country name
14	ISO	Char	3	ISO Country code
15	ISOALPHA2	Char	2	ISO Alpha2-code for country
16	ISOALPHA3	Char	3	ISO alpha3 country code
7	ISONAME	Char	55	ISO Country name
22	ISONAME2	Char	55	Clean ISO Country Name for Geocoding
13	LAT	Num	8	Unprojected degrees latitude
12	LONG	Num	8	Unprojected degrees longitude
17	MapID	Char	15	ID value from MAP dataset
18	MapIDName	Char	65	IDNAME from MAP dataset
21	MapIDName1	Char	55	ID1NAME from MAP dataset
4	MapIDName2	Char	65	Clean state/province name for geocoding
19	MapLevel	Char	25	MAP Level
10	Rank	Num	6	Grouping of CtType high-low

Test print of MAPSGFK.WORLD

ID	SEGMENT	IDNAME	LONG	LAT	X	Y
AD	1	Andorra	1.72563	42.5052	-17904.61	5442.34 . . .

Test print of MAPSGFK.WORLD_CITIES

X	Y	ID	MapIDName2	CITY2	CONT	ISONAME
-17910.84	5442.56	AD	ANDORRA	ANDORRALAVELLA	93	Andorra

LONG	LAT	ISO	ISOALPHA2	ISOALPHA3	MapID	MapIDName	MapLevel
1.5451	42.5107	020	AD	AND	AD-AD	Andorra	provinces

We opt to cross-tabulate id and idname to identify what id values to use to drop Antarctica and Greenland.

Test cross-tabulation on MAPSGFK.WORLD

ID	IDNAME	Frequency	Percent
AD	Andorra	23	0.01
AE	United Arab Emirates	485	0.20
AF	Afghanistan	618	0.25
AG	Antigua and Barbuda	70	0.03
AI	Anguilla	35	0.01
AL	Albania	207	0.08
AM	Armenia	245	0.10
AO	Angola	545	0.22

AQ	Antarctica	6145	2.49
. . .			
DZ	Algeria	483	0.20
GB	United Kingdom	3313	1.34
GD	Grenada	37	0.02
GE	Georgia	327	0.13
GF	French Guiana	152	0.06
GG	Guernsey	38	0.02
GH	Ghana	264	0.11
GI	Gibraltar	4	0.00
GL	Greenland	9721	3.95
. . .			

We now know which ID values to eliminate from our map, AND we know that ID is character, not numeric as it was in 2009. Another change to be made is to simply represent each city with the same sized dot, as the population data in MAPSGFK.WORLD_CITIES is available in overlapping population categories. Furthermore, we know that LAT and LONG are unprojected coordinates, while X and Y are projected coordinates. We edit the program to reflect the desired changes, and rerun. Snippets of the revised code and the revised map (Figure 10) are shown below.

```

DATA my_map1;
    SET mapsgfk.world;
    WHERE (density<=2) AND (id NOT IN('AQ','GL'));
RUN;

DATA dot_anno1 ;
    SET mapsgfk.world_cities;
    WHERE (id NOT IN('AQ','GL'));
    anno_flag=1;
RUN;

DATA combined1;
    SET my_map1 dot_anno1;
RUN;

PROC GPROJECT DATA=combined1 OUT=combined DUPOK PROJECT=robinson WESTLONG
LATLONG LONGMAX=140 LONGMIN=55 LATMAX=75 LATMIN=0;
    ID id;
RUN;

DATA my_map dot_anno;
SEY combined;
    IF anno_flag=1 THEN OUTPUT dot_anno;
    ELSE OUTPUT my_map;
RUN;
. . .

```

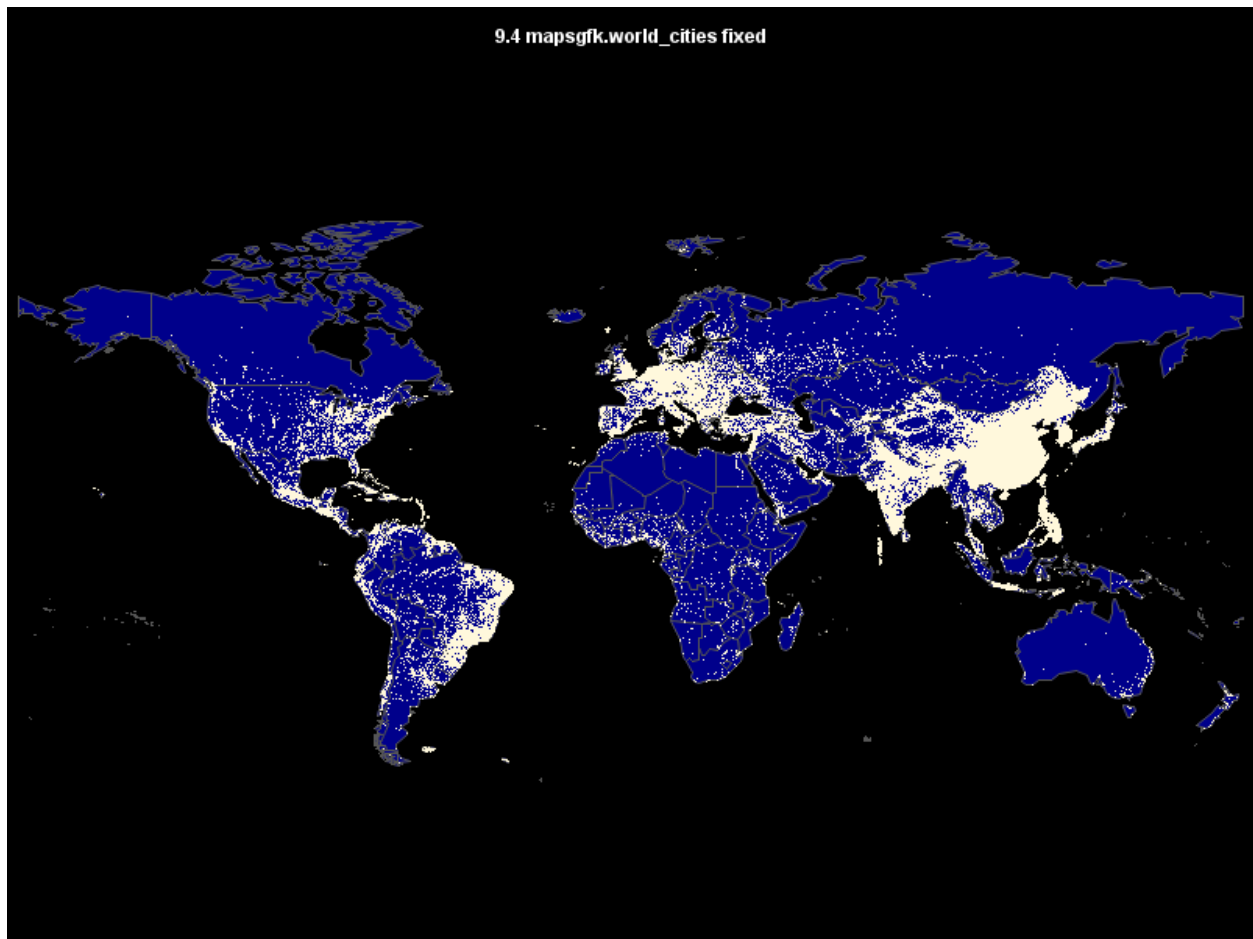


Figure 10: Corrected World at Night using MAPSGFK.WORLD and MAPSGFK.WORLD_CITIES

CODE RETROFITTING CHECKLIST

We have seen one example of retrofitting SAS code to accommodate the new GfK maps that is very easy to accomplish, one example of creating similar images that is easier to accomplish with the new GfK maps than with traditional SAS map data sets, one example of creating similar images that is harder to accomplish with the new GfK maps than with traditional SAS map data sets, and one relatively straightforward example that demonstrates many of the techniques needed to update SAS code for the GfK maps. Note that many of these tasks should be done when using traditional map data sets as well – but the changes in the MAPSGFK data sets are a good excuse to institute these practices as a general rule.

BEFORE YOU START

Make sure you know all the details about the traditional and MAPSGFK data sets, including map, annotate and response data sets. Ensure that you have downloaded the most recent relevant MAPSGFK data sets from SAS MAPSONLINE before starting out. Make sure you know all the differences between traditional and MAPSGFK data sets and understand the implications of those differences. PROC COMPARE is a good tool, as are PROC CONTENTS, PROC PRINT and PROC FREQ. In example 2, the population variable in the traditional annotate data set was a number indicating the actual population, while the same variable in the MAPSGFK annotate data set was a overlapping population category. This would not have been obvious without using PROC FREQ.

Ensure that your annotate and response data sets match up with your map data set with regard to the ID variable. MAPSGFK data sets have a very different id structure and you may need to use multiple ID variables, and you may need to create these variables on your response data set.

Be aware that your map, annotate and response data sets may need to be reprojected together in order to work. Example 2 demonstrates the technique. The contents of MAPSGFK.WORLD show that the data set has both projected and unprojected coordinates, but the contents of MAPSGFK.WORLD_CITIES show that there are only unprojected coordinates available. Therefore, the combined data set must be reprojected in order to match the map and annotate data sets together for the final product. MAPSGFK map data sets have both projected and unprojected coordinates, but this isn't necessary true of data sets commonly used for annotation. The status of traditional map data set regarding projection is not always consistent, and you may need to carefully look at programs that use annotate and/or GPROJECT.

IN PROCESS

Check your interim results carefully. In example 2, some country exclusions that occurred in the traditional map version did not happen in the MAPSGFK version due to changes in the ID variable. Variables with the same name can change in both content and variable type dimensions in between the traditional and MAPSGFK version of a data set. Once the evidence is clearly written on the map, return to your input file review and explore what might be causing the discrepancy and correct it.

REVIEWING THE FINAL PRODUCT

Look at your two maps side by side. Even if you correct any issues detected in earlier reviews, the maps might not look exactly the same. For example, MAPSGFK map files offer the possibility of more control over the map resolution, and the default projection used isn't exactly the same in all cases. You will need to evaluate if the differences matter to the final product. In example 4, we treated the population variable differently, but differences in the final product are pretty transparent to the end user. Bear in mind, too, that the underlying data may have changed. Population increases and decreases over time in given areas, new counties and cities emerge, etc.

CONCLUSION

MAPSGFK map and annotate data sets deliver more up to date and accurate data for SAS mapping than the traditional map data sets. However, using these new data sets with existing code is not always "plug and play". The examples shown will provide helpful suggestions for SAS users embarking on the task of retrofitting existing SAS/GRAPH code. In some cases (for example US county maps or maps for volatile regions in the world) it is vital that SAS users move toward using more up-to-date maps. In other cases, such as mapping US states, it is less urgent; however, the traditional map data sets are being phased out, and it has been demonstrated that code using the US map data set does not require extensive changes. Users who are nervous about losing the traditional map data sets once they stop shipping with new releases of SAS should save the folder outside of their SAS installation.

REFERENCES

Code to Project Annotate Data with a GfK Map Data Set ("Chapter 37: GMAP Procedure") in SAS/GRAPH® 9.4: Reference, Fourth Edition.
Hadden, Louise. "Where in the World Are SAS/GRAPH® Maps? An Exploration of the Old and New SAS® Mapping Capacities." Proceedings of SAS Global Forum 2014 Conference, April 2014.

<http://support.sas.com/rnd/datavisualization/maponline/index.html>

http://www.sascommunity.org/wiki/ZIP_Code_411:_Decoding_SASHELP.ZIPCODE_and_Other_SAS%C2%AE_Maps_Online_Mysteries#Online_Materials

<http://www2.sas.com/proceedings/sugi31/143-31.pdf>

http://www.gfk-geomarketing.com/en/digital_maps/software-specific_maps/maps_for_sas_graph.html

<http://support.sas.com/rnd/papers/sasgf13/GfKMaps2013.pdf>

<http://robslink.com/SAS/Home.htm>

<https://support.sas.com/documentation/cdl/en/grmapref/69722/HTML/default/titlepage.htm> (HTML)

<https://support.sas.com/documentation/cdl/en/grmapref/69722/PDF/default/grmapref.pdf> (PDF)

Massengill, Darrell. "The New SAS® Map Data Sets." Proceedings of SAS Global Forum 2016 Conference. April 2016.

Okerson, Barbara. "Mapping Roanoke Island: from 1585 to present." Proceedings of SouthEast SAS Users Group 2016 conference. October 2016.

SAS/GRAPH Concepts section of SAS/GRAPH® 9.4: Reference, Fourth Edition.

Using GfK Map Data Sets with Existing Code ("Chapter 37: GMAP Procedure") in SAS/GRAPH® 9.4: Reference, Fourth Edition.

Zdeb, Mike, Allison, Robert and Hadden, Louise. "Wow! You Did That Map with SAS/GRAPH®?" Proceedings of SAS Global Forum 2009 Conference. April 2009.

Zdeb, Mike. 2002. Maps Made Easy Using SAS. Cary, NC: SAS Institute Inc.

ACKNOWLEDGMENTS

The author wishes to acknowledge Darrell Massengill and Liz Simon of SAS who work tirelessly to improve and facilitate the use of SAS/GRAPH and mapping with SAS and maintain the SAS MAPS ONLINE site; Robert Allison of SAS who provides wonderful examples of using SAS/GRAPH and mapping tools, including some of the examples shown in this paper; and Mike Zdeb, extraordinary mapping guru. Thanks also to Barbara Okerson and Troy Martin Hughes for inspiring the Monterey examples.



CONTACT INFORMATION

Your comments and questions are valued and encouraged. Contact the author at:

Louise S. Hadden
Abt Associates Inc.
617-349-2385
Louise_hadden@abtassoc.com
abtassociates.com

SAS and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are trademarks of their respective companies.